


Wire & Cable Specification Modular Flat Telephone Cable

1. Conductor
2. Insulation
3. Sheath

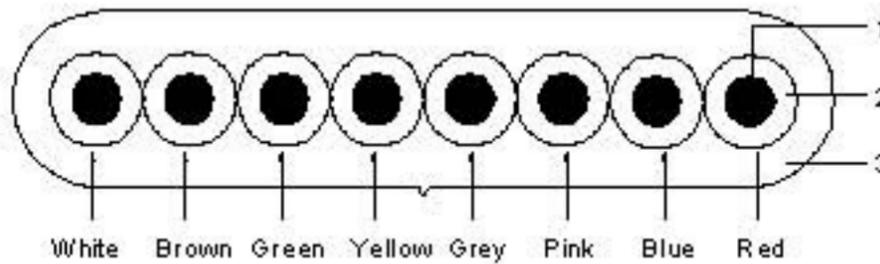

Doc. No. : 91109	Issue No. : 01	Page : 1 of 1
Effective Date : 15-08-2004	Prepared : Lqm	Checked : EP
Type	Flat Telephone Cable	
Code	91109 (EFB)	
Description	7/0.12mm x 8C (PP O.D 0.95mm) + PVC Sheath F 2.5x8.8mm	
Conductor	AWG28/7, 7/0.12±0.003mm x 8C	
Insulation	Material : PP	
	Core Color : White, Brown, Green, Yellow, Grey, Pink, Blue, Red	
	Min. Thickness 0.25mm / Nom. Thickness ≥0.29mm	
	Nom. O.D 0.95+0.05/-0mm	
Sheath	Spark Voltage: 4000V a.c	
	Material : PVC / Color: Grey	
Physical Properties	Min. Thickness 0.48mm / Nom. Thickness ≥0.60mm / Nom. O.D 2.5x8.8+0.2/-0mm	
Electrical Properties	Conductor Max. D.C Resistance : 618 Ohm/km 20°C	
Temperature rating	0 - 60°C	
Operating Voltage	300 V	
Remarks	ROHS compliant	
Packing	Paper Drum with Metal Coil Core, available length in 100m Wooden Drum, available length in 1000m	