
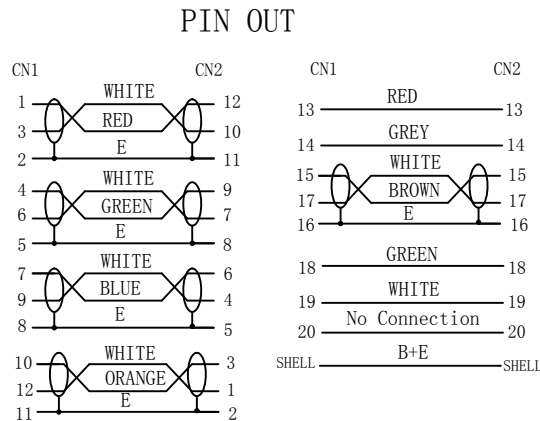


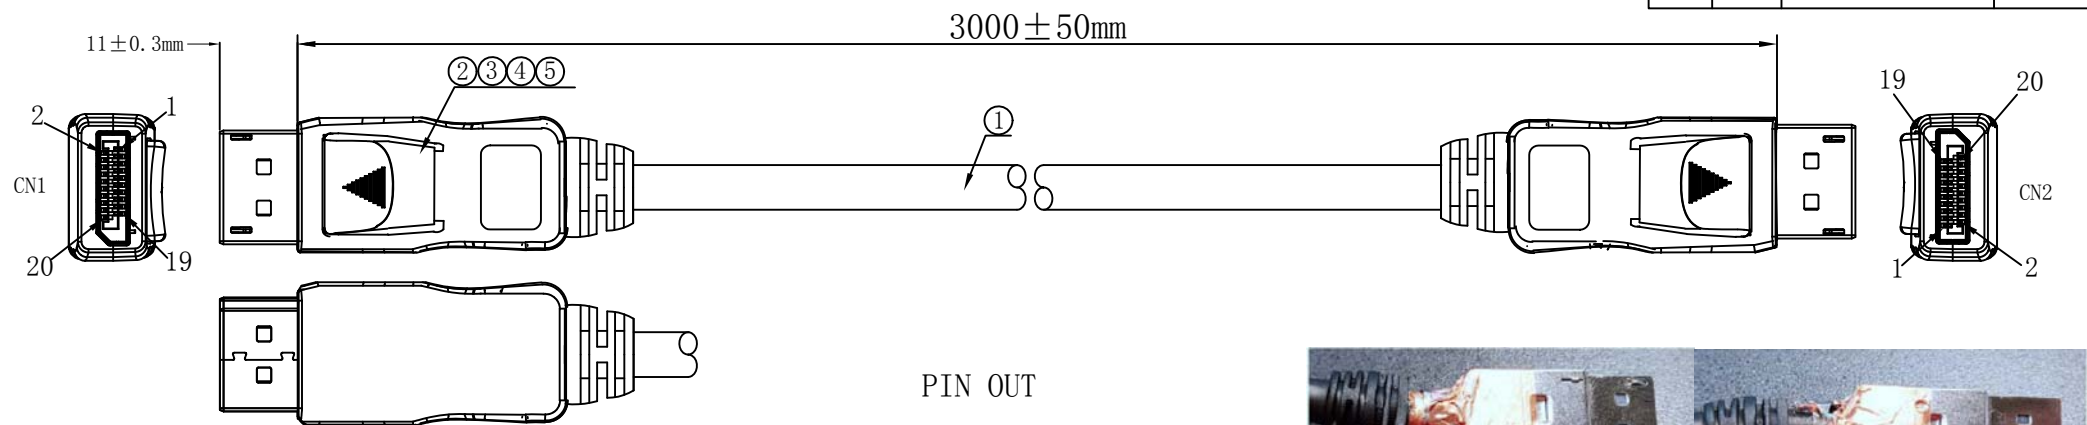

NOTE:

1.Electrical test:

- (1).100% open short & miss wire test;
- (2).Insulation resistance: DC 200V 10M Ω MIN;
- (3).Contactor resistance: 5 Ω MAX;

2.RoHS & Reach Compliant.

3.PRINT WORD: DisplayPort Cable AWM STYLE 20276 80 $^{\circ}$ C 30V VW-1

4.Display Port 1.4 Version

MATERIAL LIST:

⑤	PLASTIC HOOD	COLOR/BLACK	2	
④	OUTER MOLD	PVC 88A COLOR:BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	DisplayPort 20P/Male,The pin Gold plated,The shell Nickel plated	2	
①	CABLE	DP 1.4V 28AWG (1/0.32BC*2C+E+AL+HM)*5+1/0.32BC*4C+F+AEB E=1/0.32BC B=0.12mm/8*16 AL-MG JACKER:PVC/BLACK OD:7.3 $\pm$ 0.2mm	1	
NO.	PARTS. NAME	SPECIFICATION STANDARD	QT' Y	REMARK

CUSTOMER'S ITEM	K5567SW.3	CUSTOMER	EFB	
DRAWING		TITLE	Display Port DP/M-DP/M	
UNIT	mm	SCALE	REV	
DRAWN BY		CHECK BY	APPRO BY	
Zhouqinghua				2019/12/20