




Art.-Nr. 53316.34

Singlemode SC/SC duplex adaptor
metal housing , ceramic sleeve , with dust cap

Specification

Item	Adaptors
Sleeve Material	Ceramic
Typical Insertion Loss	0.2dB
Operating Temperature	-40°C/ +75°C
Storage Temperature	-55°C/ +85°C

Mechanical Diagram

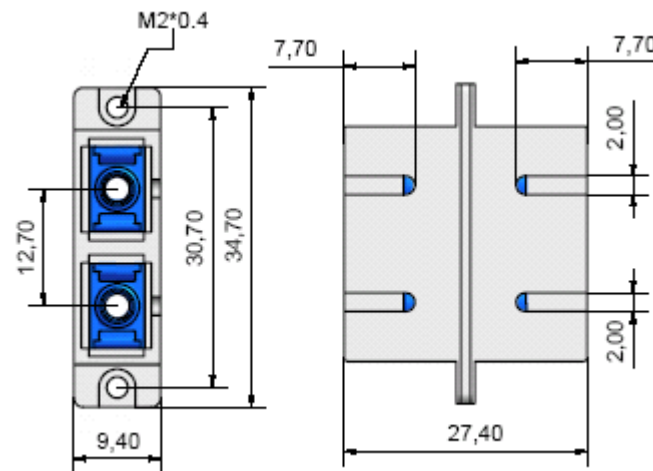

The performance of the adaptors has been carefully designed to meet the toughest Telcordia standards

EIA-455 , GR-326-CORE

in the tests of:

- OPTICAL CHARACTERISTICS
- VIBRATION TEST
- THERMAL CYCLING
- IMPACT RESISTANCE
- SALT SPRAY EROSION
- THERMAL AGING
- HUMIDITY RESISTANCE
- OTHERS