


Wire & Cable Specification Modular Flat Telephone Cable

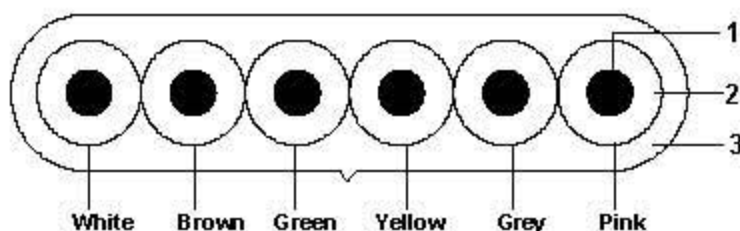

1. Conductor
2. Insulation
3. Sheath

Doc. No. : 91106	Issue No. : 01	Page : 1 of 1
Effective Date : 15-08-2004	Prepared : Lqm	Checked : EP
Type	Flat Telephone Cable	
Code	91106 (EFB)	
Description	7/0.12mm x 6C (PP O.D 0.95mm) + PVC Sheath F 2.5x7.0mm	
Conductor	AWG28/7, 7/0.12±0.003mm x 6C	
Insulation	Material : PP	
	Core Color : White, Brown, Green, Yellow, Grey, Pink	
	Min. Thickness : 0.25mm / Nom. Thickness : 0.29mm / Nom. O.D : 0.95+0.05/-0mm	
	Spark Voltage : 4000V a.c	
Sheath	Material : PVC / Color: Black	
	Min. Thickness : 0.48mm / Nom. Thickness : 0.60mm / Nom. O.D : 2.5X7.0+0.2/-0mm	
Physical Properties		
Electrical Properties	Conductor Max. D.C Resistance : 618 ohm/km 20°C	
Temperature rating	0 - 60°C	
Operating Voltage	300 V	
Remarks	ROHS compliant	
Packing	Paper Drum with Metal Coil Core, available length in 100m. Wooden Drum, available length in 500m.	