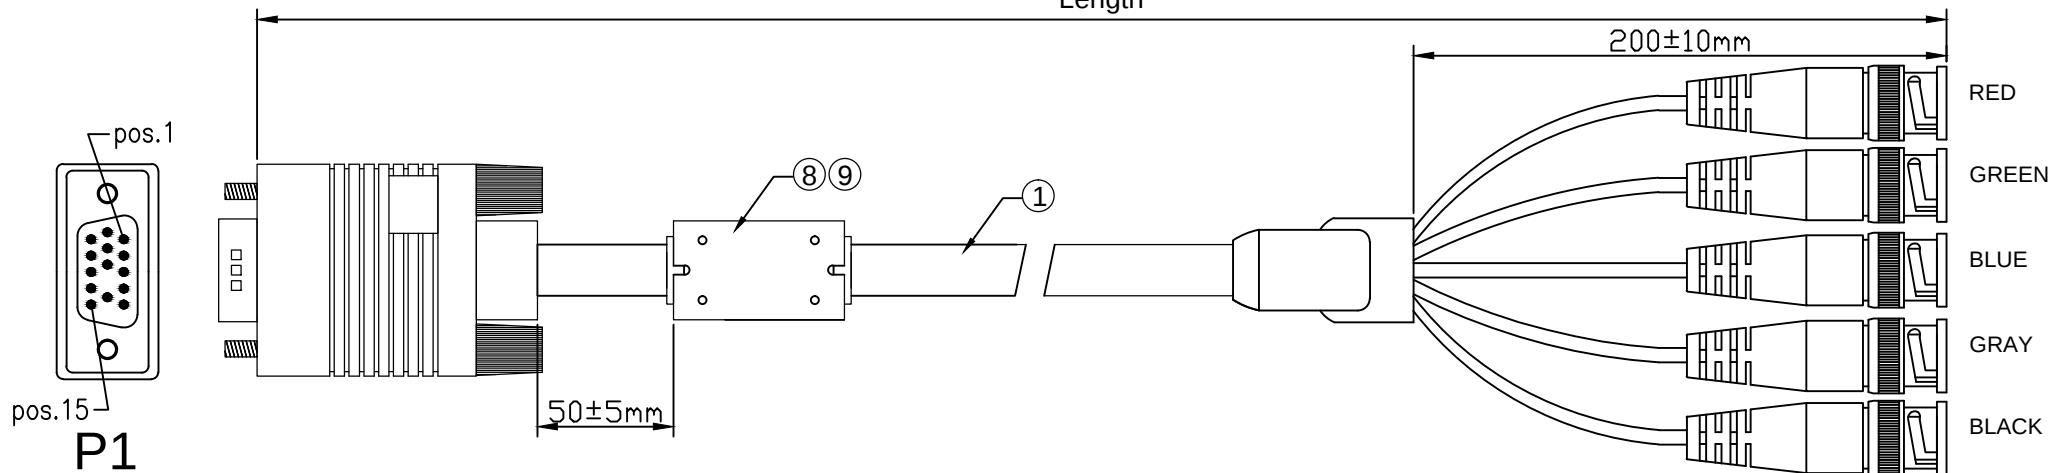


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/10/07	

Length

Signal Assignment

HDB15P/M		BNC M	
1	Red		RED COAXIAL
6			RED SHIELD
2	Green		GREEN COAXIAL
7			GREEN SHIELD
3	Blue		BLUE COAXIAL
8			BLUE SHIELD
13	Gray		GRAY COAXIAL
10			GRAY SHIELD
14	Black		BLACK COAXIAL
11			BLACK SHIELD
Shell			

Remark:

- 1.100% Open/Short Test
- 2.Contact Resistance:30mohms MAX
- 3.Insulation Resistance:5M ohm MIN.
- 4.HI-POT:DC 300V/10MS.
- 5.The product is RoHS compliant.

Item NO.	Length
EK553SW.2V2	2.0m
EK553SW.3V2	3.0m
EK553SW.5V2	5.0m

⑤	External Mold	Outer Mould 45P PVC		
④	Internal Mold	Inner Mould PE		
③	Connector	BNC Male, Nickel-Plated	5PCS	
②	Connector	HDB15M Blue Plastic Core, Gold-Plated, w/o 9pin	1PC	
①	Cable	CABLE 5COAX(RED, GREEN, BLUE, GRAY, BLACK)+AI foil+ +Drain wire + Braiding(64AL)+OD9.0mm PVC, Black, Smooth Outer Jacket		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ERP NO.:				SAMPLE DWG NO.:	
DOC No.:				REVISION	A0
CUSTOMER:				UNIT	mm
CUSTOMER P/N:				SCALE	NO
DESCRIPTION				PAGE NO	1/1
				DATE	2020/10/07
APPROVAL		CHECKED		DRAWN	