
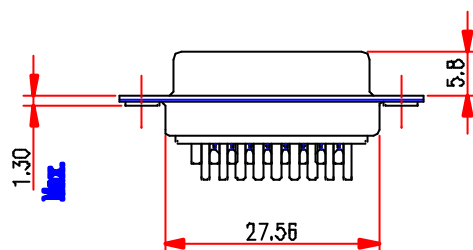
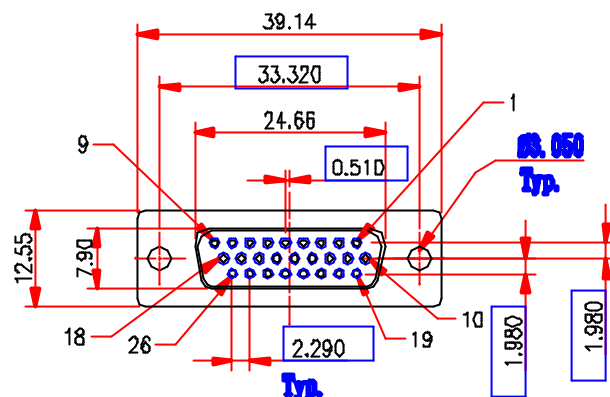


HD26F

**Note**

1

Housing	PBT UL94V-0	White Colour
Contact	Brass	Gold Flash
Shell	SPCC. (Front)	Nickel Plated
	SPCC. (Heel)	Tin Plated

2

SPECIFICATION

Current Rate: 5 A

Insulation Resistance: 1000 Megaohm Minimum at 500VDC

Dielectric Strength: 500V per Minute

Operation Temperature: -50°C to +100°C

Contact Resistance: 13 Milliohm Maximum

CONNECTOR:

HIGH DENSITY D-SUB 26PIN FEMALE,
SOLDER TYPE, WHITE INSULATION

PART NO. 7018

Revision:

APPROVED

CHECKED

DRAWING

JOAN

SNOW

ITEM NO.

E E B
ELEKTRONIK

34510.1

Cable Length
Unless Other Spec.

Tolerances:

0 ~0.2M	±0.01M
0.21~1.0M	±0.02M
1.1 ~1.5M	±0.025M
1.51~2.1M	±0.03M
2.1M ↑	±0.04M