

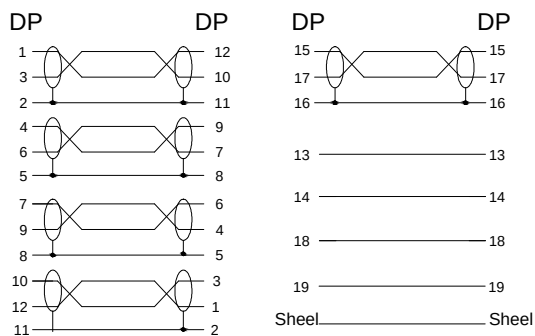


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/29	

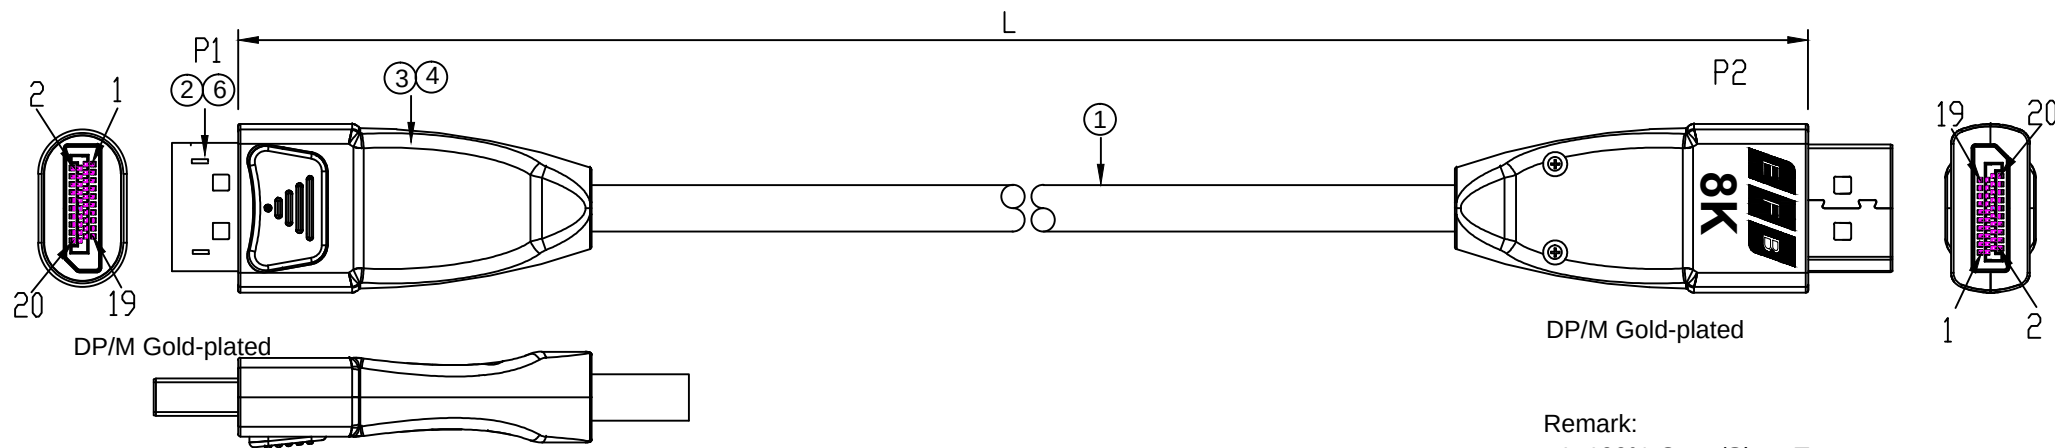

Wire method

Cable Spec.



- A) Conductor 7/0.127TC
- B) Insulation FPE 1.0mm
- C) Drain wire 7/0.127TC
- D) Al foil
- E) Hot Mylar
- F) Conductor 7/0.127TC
- G) Insulation PE 0.7mm
- H) Al Foil
- I) D.w.
- J) Braiding 16/10/0.12AL
- K) Jacket OD: 7.3±0.15mm Black

Remark:

1. 100% Open/Short Test
2. Conductive Resistance: 50ohms MAX
3. Insulation Resistance: 10M ohm MIN.
4. HI-POT: DC 300V/10MS.
5. The product is RoHS compliant.
6. Dp to Dp 1.4V

Item NO.	Length
K5567HQS.W.5	5.0m

⑤	Lid	PE, DP Lid	2PCS	
④	Shell	Zinc alloy, Dumb gun black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	DP male , Gold-Plated	2PCS	
①	Cable	DP 1.4V28AWG [(7/0.127TC+FPE)*1P+7/0.127TC+AL]*5C+ (7/0.127TC+HDPE)*5C+AL+D+160/0.12ALB+ PVCOD7.3mmBlack		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1

ERP NO.:		SAMPLE DWG NO.:	
ZG No.:	ZG-2203M1	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	DP Male to DP Male	PAGE NO	1/1
		DATE	2019/11/29
APPROVAL		CHECKED	
		DRAWN	