


DATASHEET

Universal Cable U-DQ (ZN) BH

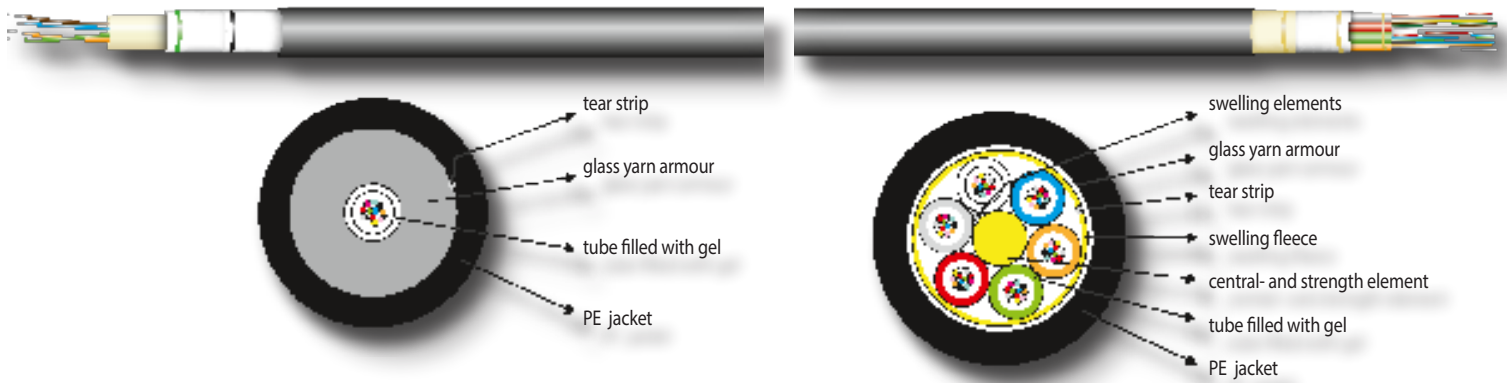

Central tube up to 24 Fiber

Loose tube 48 up to 144 Fibers

Specifications

Application:

- Indoor- and outdoor application
- Installation in conduits and shafts
- Primary cabling (Campus), Backbone
- Secondary cabling (vertical): riser area (backbone)

Characteristics:

- Universal cable LSZH black, non-metallic, longitudinal water tight
- UV resistant, halogenfree, rodent resistant
- Suitable for blowing in application
- Central/Loose tubes, 250µm coating

Technical data

Standards:

- Flame retardant: IEC 60332-1, Halogenfree: IEC 60754-2, Low smoke: IEC 61034
- Transmission specification: IEC 60793, ITU-T G657A1 biegeunempfindlich, G651
- Cabling: ISO/IEC 11801, EN 50173, Längswasserdicht: IEC 60794-1-2

Temperature Range:

- Operation: -20°C ~ 70°C / G657A1 Faser -40°C ~ 70°C
- Transport /Storage: -30°C ~ 70°C
- Installation: - 5°C ~ 50°C

Optical Data

Fiber (µm), Type	62.5/125 Multimode	50/125 Multimode	50/125 Multimode	50/125 Multimode	50/125 Multimode	9/125 Singlemode
Fiber category	OM1	OM2	OM3	OM4	OM5	G.657.A1
Wavelengths (nm)	850 / 1300	850 / 1300	850 / 1300	850 / 1300	850 / 953 / 1300	1310 / 1550 / 1625
Typ. attenuation (db/km):	≤ 3.2 / ≤ 0.9	≤ 2.7 / ≤ 0.7	≤ 2.7 / ≤ 0.8	≤ 2.7 / ≤ 0.8	≤ 2.5 / ≤ 1.8 / ≤ 0.7	≤ 0.35 / 0.22 / 0.25
Over filled Launch Bandwidth (OFL = Over Filled Launch)MHz*km	200 / 500	500 / 500	1500 / 500	3500 / 500	3500 / 1850 / 500	- / -
Minimum Effective Modal Bandwidth (EMB) MHz*km	- / -	- / -	2000 / -	4700 / -	4700 / 2470 / -	- / -



Art.-No.	U-DQ (ZN) BH	File	U-DQ (ZN) BH_NEU.indd		
Description	Universal Cable U-DQ (ZN) BH				
Created	Date	Last Revision	Date	Checked	Date
Alexander Müller	08.10.2013	BF	14.03.2017	JB	14.03.2017

DATASHEET

Order data

	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	G657A (OS2) 9/125 μ	54404.1	04E (1 x 4) Singlemode G657A	U-DQ(ZN)BH	04E9/125	7,0 mm	50kg / km	1600 N
	54408.1	08E (1 x 8) Singlemode G657A	U-DQ(ZN)BH	08E9/125	7,0 mm	50kg / km	1600 N	140 mm
	54412.1	12E (1 x 12) Singlemode G657A	U-DQ(ZN)BH	12E9/125	7,0 mm	50kg / km	1600 N	140 mm
	54424.1	24E (1 x 24) Singlemode G657A	U-DQ(ZN)BH	24E9/125	7,6 mm	59kg / km	1600 N	150 mm
	54448.1	48E (4 x 12) Singlemode G657A	U-DQ(ZN)BH	48E9/125	10,6 mm	96kg / km	4000 N	210 mm
	54472.1	72E (6 x 12) Singlemode G657A	U-DQ(ZN)BH	72E9/125	11,3 mm	114kg / km	4000 N	230 mm
	54496.1	96E (8 x 12) Singlemode G657A	U-DQ(ZN)BH	96E9/125	13,0 mm	142kg / km	4000 N	260 mm
	544144.1	144E(12x12)SinglemodeG657A	U-DQ(ZN)BH	144E9/125	16,3 mm	216kg / km	5500 N	330 mm
OM5 50/125 μ	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	54504.1OM5	04G (1 x 4) Multimode OM5	U-DQ(ZN)BH	04G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54524.1OM5	24G (1 x 24) Multimode OM5	U-DQ(ZN)BH	24G50/125	7,6 mm	59kg / km	1600 N	150 mm
OM4 50/125 μ	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	54504.2	04G (1 x 4) Multimode OM4	U-DQ(ZN)BH	04G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54508.2	08G (1 x 8) Multimode OM4	U-DQ(ZN)BH	08G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54512.2	12G (1 x 12) Multimode OM4	U-DQ(ZN)BH	12G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54524.2	24G (1 x 24) Multimode OM4	U-DQ(ZN)BH	24G50/125	7,6 mm	59kg / km	1600 N	150 mm
	54548.2	48G (4 x 12) Multimode OM4	U-DQ(ZN)BH	48G50/125	10,6 mm	96kg / km	4000 N	210 mm
OM3 50/125 μ	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	54504.1	04G (1 x 4) Multimode OM3	U-DQ(ZN)BH	04G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54508.1	08G (1 x 8) Multimode OM3	U-DQ(ZN)BH	08G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54512.1	12G (1 x 12) Multimode OM3	U-DQ(ZN)BH	12G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54524.1	24G (1 x 24) Multimode OM3	U-DQ(ZN)BH	24G50/125	7,6 mm	59kg / km	1600 N	150 mm
	54548.1	48G (4 x 12) Multimode OM3	U-DQ(ZN)BH	48G50/125	10,6 mm	96kg / km	4000 N	210 mm
OM2 50/125 μ	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	54204.1	04G (1 x 4) Multimode OM2	U-DQ(ZN)BH	04G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54208.1	08G (1 x 8) Multimode OM2	U-DQ(ZN)BH	08G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54212.1	12G (1 x 12) Multimode OM2	U-DQ(ZN)BH	12G50/125	7,0 mm	50kg / km	1600 N	140 mm
	54224.1	24G (1 x 24) Multimode OM2	U-DQ(ZN)BH	24G50/125	7,6 mm	59kg / km	1600 N	150 mm
	54248.1	48G (4 x 12) Multimode OM2	U-DQ(ZN)BH	48G50/125	10,6 mm	96kg / km	4000 N	210 mm
OM1 62,5/125 μ	Art.-No.	Tubes/Fibers	VDE-Type		Cable	Weight	Tensile Force	Bending Radius
	54304.1	04G (1 x 4) Multimode OM1	U-DQ(ZN)BH	04G62,5/125	7,0 mm	50kg / km	1600 N	140 mm
	54308.1	08G (1 x 8) Multimode OM1	U-DQ(ZN)BH	08G62,5/125	7,0 mm	50kg / km	1600 N	140 mm
	54312.1	12G (1 x 12) Multimode OM1	U-DQ(ZN)BH	12G62,5/125	7,0 mm	50kg / km	1600 N	140 mm
	54324.1	24G (1 x 24) Multimode OM1	U-DQ(ZN)BH	24G62,5/125	7,6 mm	59kg / km	1600 N	210 mm



Art.-No.	U-DQ (ZN) BH	File	U-DQ (ZN) BH_NEU.indd		
Description	Universal Cable U-DQ (ZN) BH				
Created	Date	Last Revision	Date	Checked	Date
Alexander Müller	08.10.2013	BF	14.03.2017	JB	14.03.2017