

NOTE:

- 1.Electrical test:
- (1).100% open short & miss wire test;


(2).Insulation resistance: DC 200V 10MΩ MIN;

(3).Conductor resistance: 3Ω MAX
- 2.RoHS Compliant.

MATERIAL LIST:

⑤	PLASTIC HOOD	ABS COLOR/BLACK	1	
④	INNER MOLD	PVC COLOR/BLACK	1	
③	PCBA	USB 3.0 AF TO TYPE CM PCBA	1	
②	CONNECTOR 2	USB 3.1 C TYPE PIN Gold-Platde Fu", Shell Ni-Plated;	1	
①	CONNECTOR 1	USB 3.0 AF PIN Gold-Platde Fu", Shell Ni-Plated;	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK

WIRE TABLE

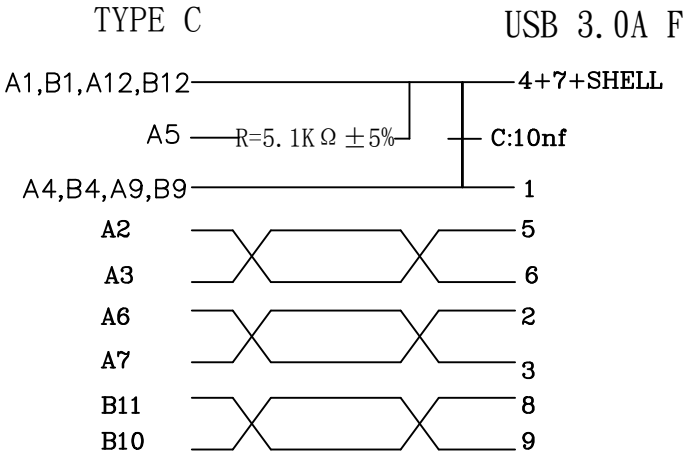

CUSTOMER'S ITEM				CUSTOMER		EFB			
DRAWING		BD-ZQH0028		TITLE	TYPE C ADAPTER				
UNIT		mm	SCALE			REV	A/O		
DRAWN BY		CHECK BY		APPRO BY		DATE			
Zhouqinghua						2020/2/21			