



N300 PoE Wireless Access Point, In-Wall Mount, Controller Managed

The LevelOne WAP-6221 is a superior quality Wi-Fi access point delivering ultra high-speed connectivity and extended coverage. The device is PoE, so does not need to be placed near a power source. Designed to be mounted on a wall, the stylish low profile and front port access compliments the device's powerful performance, and built-in USB charger port . Work with WAC-2000 can make configuration easier.



1. Power LED
2. WIFI LED
3. WAN LED
4. LAN Port
5. USB Charge Port
6. Switch ON/OFF
7. WAN/POE Port

Key-features

- Nutzen Sie Ihr drahtloses Netzwerk mit bis zu 300 MBit/s
- Kompatibel zu den Standards von IEEE-802.11b/g/n
- Unterstützt hohe Sicherheit durch WEP-, WPA- und WPA2-Verschlüsselung mit IEEE-802.1X
- Verfügt über bis zu 4 SSIDs um Netzwerkverkehr zu trennen und zur Verbesserung der Sicherheit
- Multi-Betriebsmodi für unterschiedliche Drahtlosanwendungen
- IEEE-802.3af PoE kompatibel zur einfachen Verwendung und Installation
- In-wall mounted design fits standard 86x86mm socket

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet
 IEEE 802.3u 100-BASE-TX, Fast Ethernet
 IEEE 802.11e Wi-Fi Multimedia (WMM)
 IEEE 802.3x Ethernet Flow Control
 IEEE 802.11i Wi-Fi Protected Access (WPA2)
 IEEE 802.11b, IEEE 802.11g, IEEE 802.11n Wireless Networking
 IEEE 802.3 af Power over Ethernet

**Connectors and Cabling:**

1x USB2.0 Port
1x 10/100Mbps Base-TX
1x 10/100Mbps Base-TX PoE Port

Taster:

Reset button
Power on/off button

Indikator:

WLAN LED
Power LED
system status LED
ethernet LED

Power Input:

IEEE802.3af

Power Consumption:

<8W

Wireless

Operating Mode:

AP, Gateway, Universal Repeater

Encryption:

WEP 64/128-bit Web share key encryption
WPA, WPA2 128-bit TKIP/AES encryption
WPA, WPA2-PSK TKIP/AES encryption

Receive Sensitivity(dBm):

802.11n (40MHZ): Range (-68) dBm
802.11n (20MHZ): Range (-68) dBm
802.11g: Range (-68) dBm
802.11b: Range (-85) dBm

Channel:

Ch.1 ~ 11 USA
Ch.1 ~ 13 EU

EIRP(dBm):

802.11n: up to 15dBm $\pm$ 1dBm
802.11g: up to 16dBm $\pm$ 1dBm
802.11b: up to 20dBm $\pm$ 1dBm

Antenna:

2*3 dBi inside Omni Antenna

Frequenz:

2.4 ~ 2.4835 GHz

Data Transfer Rate:

802.11n: 300 ~ 78 Mbps
802.11g: 54 ~ 6 Mbps
802.11b: 11 ~ 1 Mbps

Features

General:

Multi-SSID: 4 SSIDs

PoE:

802.3af

Security:

SSID Broadcast On/Off

Management:

Web-Based GUI Configuration

Syslog monitoring (fit model)

QoS:

802.11e WMM Supported

Ease of Use:

Web-based GUI with Quick Installation Wizard

Web-based (HTTP) firmware upgrade

Performance

Number of Clients:

Max: 36

Recommend:32

Environment

Temperatur (°C):

Operating:-10°C ~ -50°C

Storage: -30°C ~ 70°C

Luftfeuchtigkeit (nicht kondensierend):

Storage: 10 ~ 95%

Operating: 5 ~ 90%

Deployment:

Wall Mount

Physical Specifications

Abmessungen (W x D x H mm):

86mm*86mm*68mm

Gewicht:


267

Approval and Compliance

Zertifizierung:

CE

Diagramm

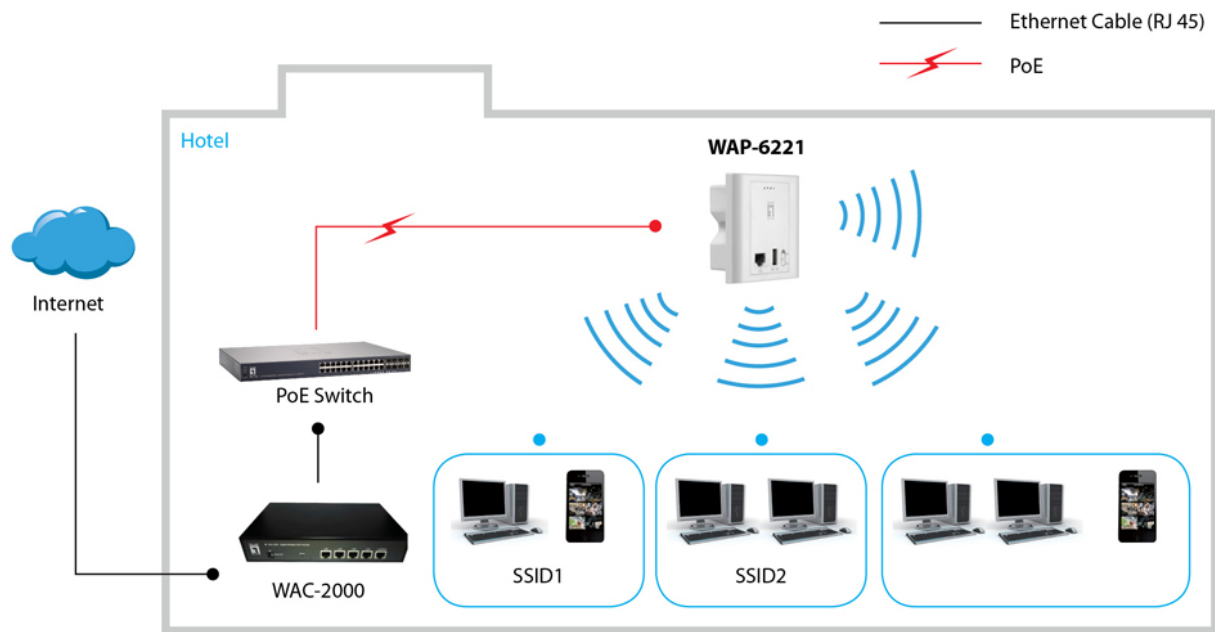

Order Information

WAP-6221

Package Contents

WAP-6221

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.