


DATASHEET

Attenuators LC/SPC

Item No.: 533680.X

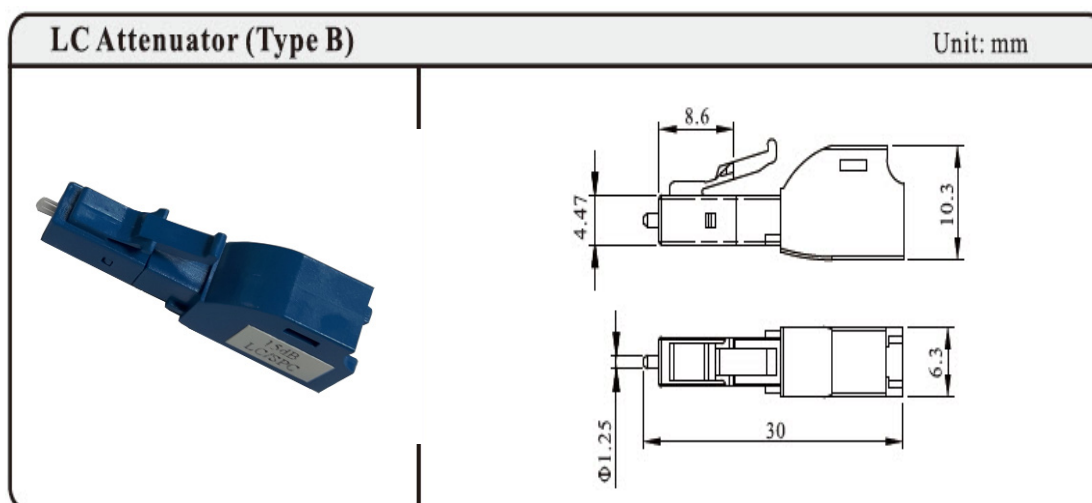

Specification

Item	Specifications	
	A Grade	P Grade
Wavelength	850nm (Multi-Mode)	
Attenuation Tolerance(dB)	2dB,5dB,10dB $\leq \pm 1.0\text{dB}$	2dB,5dB,10dB $\leq \pm 0.5\text{dB}$
	15dB $\leq \pm (10\% \times A)^*$	15dB $\leq \pm (5\% \times A)^*$
Return Loss	/	
Operating Temperature	-40℃~+75℃	
Storage Temperature	-40℃~+75℃	
Note: A = Attenuation Value		

Item	Specifications	
	A Grade	P Grade
Wavelength	1310nm and 1550nm (Single-Mode)	
Attenuation Tolerance(dB)	1-10dB<±1.0dB	1-10dB<±0.5dB
	11-25dB<±(10%×A)*	11-25dB<±(5%×A)*
Return Loss	RL≤ -50dB (UPC) RL≤ -60dB (APC)	
PDL	<0.1dB	
Operating Temperature	-40℃~+75℃	
Storage Temperature	-40℃~+75℃	
Note: A = Attenuation Value		



Art.No.	533680.X	File	533680.X.indd		
Description	Attenuators LC/SPC				
Created	Date	Last revision	Date	Proved	Date
JB	20.07.2016	JB	20.07.2016	JB	20.07.2016