



| REVISION | | | |
|----------|------|-------------|----------|
| REV | DATE | DESCRIPTION | APPRO.BY |
| | | | |

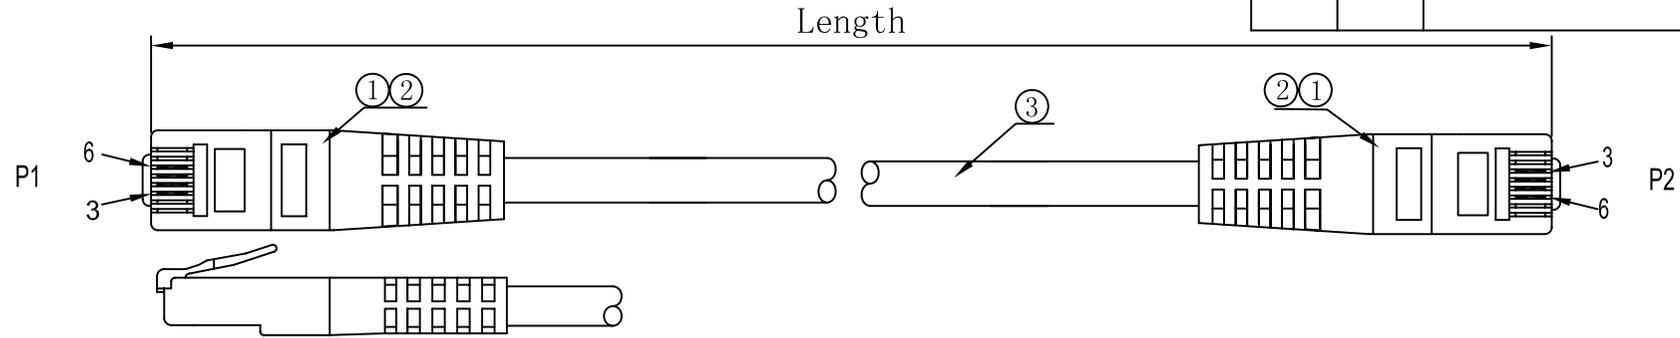

WIRING DIAGRAM

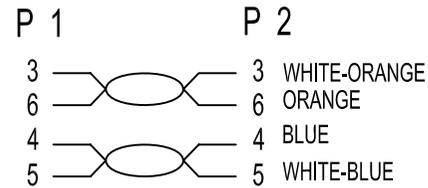

NOTE:

1. ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE IS NOT PERMITTED
2. KEEP CLEAN
3. RoHS COPLIANT
4. PRINTING: **ISDN High Quality Moulded Patchcord RJ45 8/4**

| | | | |
|-----|-----------|---|-------|
| ③ | CABLE | UTP CAT.5E 24AWG CCA stranded 4pairs cable JACKET BLACK OD=4.5mm | 1 Pcs |
| ② | OVERMOLD | PVC COLOR:BLACK | 2 Pcs |
| ① | CONNECTOR | RJ45 8P4C(3456) , GOLD PLATED 3-50u" TRANSPARENT | 2 Pcs |
| NO. | MAT.NAME | DESCRIPTION | Q'TY |

| | | | | | | |
|-----------------|----|------------|-----------|------------|-----|--|
| CUSTOMER'S ITEM | | K2422.X | CUSTOMER | | EFB | |
| DRAWING | | KK0311 | TITLE | PATCH CORD | | |
| UNIT | mm | SCALE | 1:1 | REV | | |
| DRAWN BY | | CHECK BY | APPRO BY | DATE | | |
| Nancy.Tang | | Mao Yanhua | Amy.Zhang | 2011.03.15 | | |