


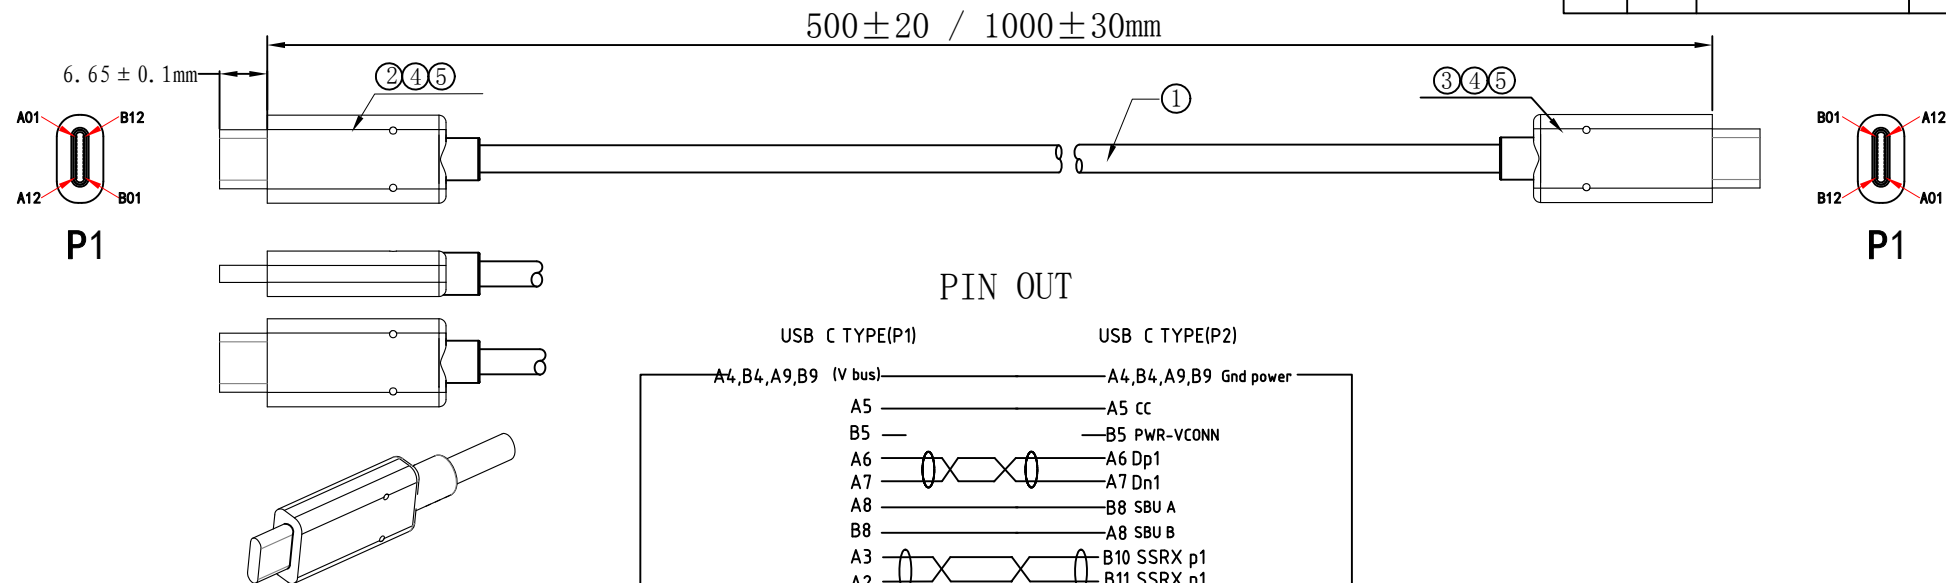


NOTE:

1.Electrical test:

- (1).100% open short & miss wire test;
- (2).Insulation resistance:DC 200V 10MΩ MIN;
- (3).Conductor resistance:5Ω MAX;

2. RoHS COMPLIANT

3.The transmission speed reaches the GEN1 3A/5G standard.

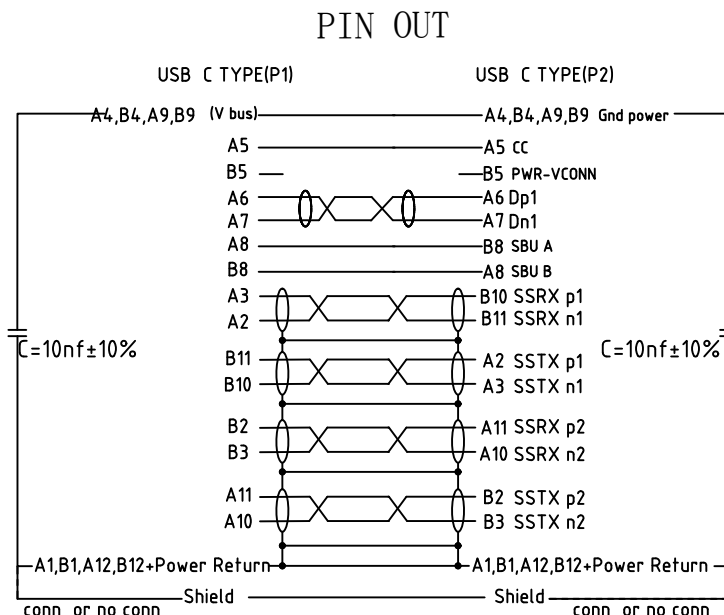

MATERIAL LIST:

④	OUTER MOLD	PVC 88A COLOR/BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	USB 3.1 C TYPE PIN Gold-Platde Fu", Shell Ni-Plated;	2	
①	CABLE	USB3.2 GEN1 32AWG (7/0.08TC*1P+E+AL+ML)*4+7/0.08TC*1P+7/0.08TC*4C+7/0.20TC*2C+AEB B=0.12mm/5*16AL-MG E=7/0.08TC JACKET:PVC/BLACK OD:4.5±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK

CUSTOMER'S ITEM	K5283-3ASW.X	CUSTOMER	EFB	
DRAWING		TITLE	USB3.2 GEN1 CM - CM	
UNIT	mm	SCALE	REV	A/0
DRAWN BY	CHECK BY		APPRO BY	DATE
Zhouqinghua				2020/2/17