
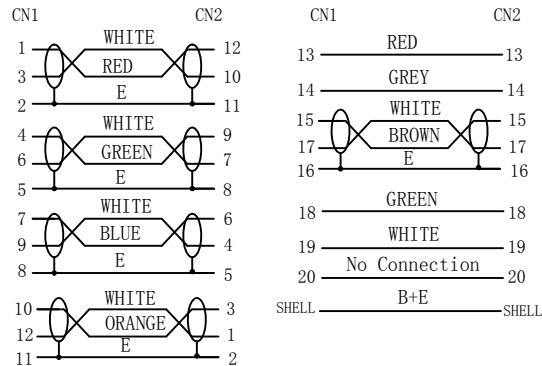


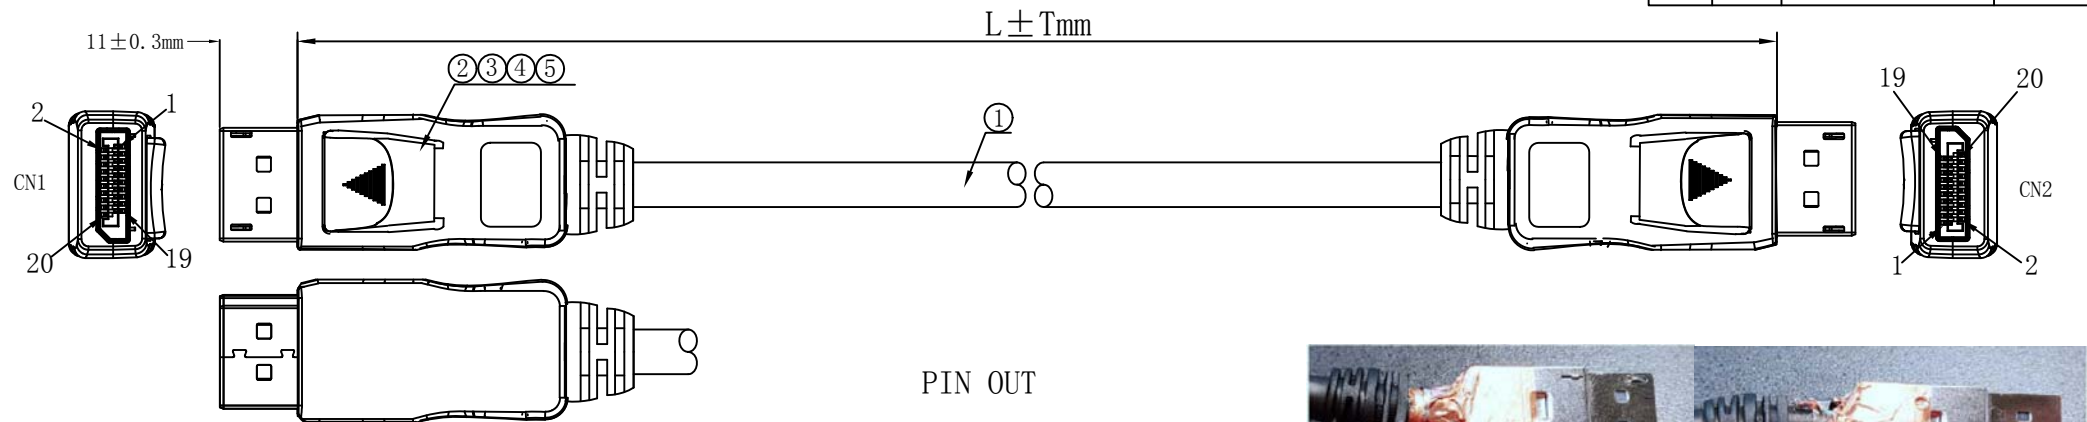

NOTE:

1.Electrical test:

- (1).100% open short & miss wire test;
- (2).Insulation resistance: DC 200V 10M Ω MIN;
- (3).Contactor resistance: 5 Ω MAX;

2.RoHS & Reach Compliant.

3.PRINT WORD: DisplayPort Cable AWM STYLE 20276 80℃ 30V VW-1

4.Display Port 1.4 Version

MATERIAL LIST:

⑤	PLASTIC HOOD	COLOR/BLACK	2	
④	OUTER MOLD	PVC 88A COLOR:BLACK	2	
③	INNER MOLD	LD-PE NATURE IN COLOR	2	
②	CONNECTOR	DisplayPort 20P/Male,The pin Gold plated,The shell Nickel plated	2	
①	CABLE	DP 1.4V 30AWG (1/0.254BC*2C+E+AL+HM)*5+1/0.254BC*4C+AEB E=1/0.254BC B=0.12mm/9*16 AL-MG JACKER:PVC/BLACK OD:6.0 $\pm$ 0.2mm	1	
NO.	PARTS. NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Item No.	Length
K5567SW.0.5	500 $\pm$ 15mm
K5567SW.1	1000 $\pm$ 20mm
K5567SW.1.5	1500 $\pm$ 20mm
K5567SW.1.8	1800 $\pm$ 25mm
K5567SW.2	2000 $\pm$ 30mm

CUSTOMER'S ITEM		CUSTOMER	EFB	
DRAWING		TITLE	Display Port DP/M-DP/M	
UNIT	mm	SCALE	REV	A/0
DRAWN BY	CHECK BY	APPRO BY	DATE	
Zhouqinghua			2019/12/20	