DATASHEET

IDC Connector 50pole ,grey ,pitch 2.54 E-WP

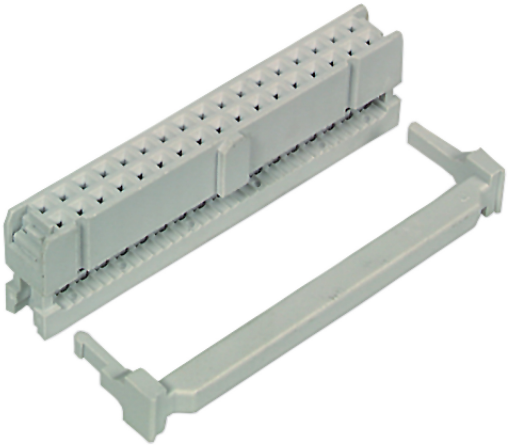

General data
IDC Connector, pitch 2.54

Technical properties	
Angle PCB/contact	0°/180° (horizontal)
Inflammability class of insulation material according to with UL94	V0
Material insulation body	Thermoplast
Modular spacing connections	1.27 mm
Type of connection	Flexible PCB-connector

Available variants

ArtNr.	Bezeichnung	Number of poles	Type
20010.3	IDC Connector 10pole ,grey ,pitch 2.54 E-WP	10	E-WP 10pol.
20014.3	IDC Connector 14pole ,grey ,pitch 2.54 E-WP	14	E-WP 14pol.
20016.3	IDC Connector 16pole ,grey ,pitch 2.54 E-WP	16	E-WP 16pol.
20020.3	IDC Connector 20pole ,grey ,pitch 2.54 E-WP	20	E-WP 20pol.
20026.3	IDC Connector 26pole ,grey ,pitch 2.54 E-WP	26	E-WP 26pol.
20034.3	IDC Connector 34pole ,grey ,pitch 2.54 E-WP	34	E-WP 34pol.
20040.3	IDC Connector 40pole ,grey ,pitch 2.54 E-WP	40	E-WP 40pol.
20050.3	IDC Connector 50pole ,grey ,pitch 2.54 E-WP	50	E-WP 50pol.
20064.3	IDC Connector 64pole ,grey ,pitch 2.54 E-WP	64	E-WP 64pol.

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de