




DATASHEET

Dsub Solder Jack EDF 09 LL/Z, 09-pole

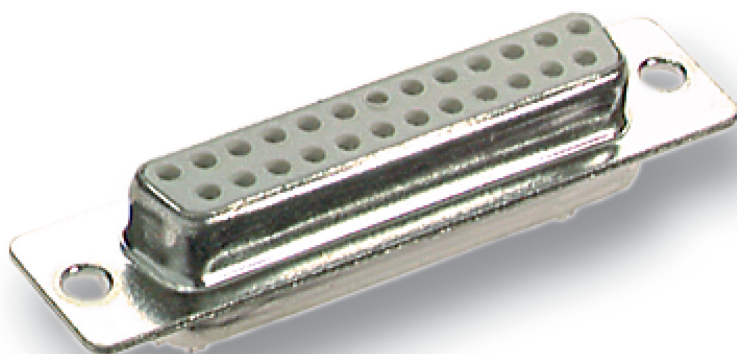

General data

The D-Sub solder socket 9 pin from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a 180° connection angle, female contact design and suitability for round and flat cables, it supports compact and standard-compliant connectors in technical applications.

- 9-pin D-Sub solder socket for PCB mounting
- 180° design with soldering connection type for a stable PCB connection
- Female contact design for matching connectors with round and flat cable

Due to the temperature range of -40 to 70 °C, the EDF 09 LL/Z version is intended for different environments. The receptacle supports conductor cross-sections from 34AWG to 20AWG, making it suitable for applications where a precise and durable interface is required.

Technical details

- Type: EDF 09 LL /Z
- Connection type: Soldering
- Shooting angle: 180°
- Finish: Socket
- For cable type: round/flat
- Contact version: female
- Conductor cross-section: 34AWG ~ 20AWG

This datasheet was created automatically on 13-10-2026 . Technical changes reserved.



DATASHEET

Dsub Solder Jack EDF 09 LL/Z, 09-pole

- Number of poles: 9
- Temperature range: -40 – 70 °C
- Brand: EFB-Elektronik
- Packaging: 50 pieces per blister

Technical properties

Conductor cross-section	34AWG ~ 20AWG
Connection angle (180°/90°)	180 °
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
For cable type (round/flat)	round/flat
Model	jack
Temperature range	-40 – 70

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
28603.1	Dsub Solder Jack EDF 09 LL/Z, 09-pole	9	EDF 09 LL /Z	50 pieces per tray	2
28606.1	Dsub Solder Jack EDF 15 LL/Z, 15-pole	15	EDF 15 LL /Z	50 pieces per tray	2
28611.1	Dsub Solder Jack EDF 25 LL/Z, 25-pole.	25	EDF 25 LL /Z	50 pieces per tray	2
28614.1	Dsub Solder Jack EDF 37 LL/Z, 37-pole	37	EDF 37 LL /Z	40 pieces per tray	2
28617.1	Dsub Solder Jack EDF 50 LL/Z, 50-pole	50	EDF 50 LL /Z	40 pieces per tray	3

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 13-10-2026 . Technical changes reserved.

