
DATASHEET

Dsub Solder Jack EDF 25 LL/Z, 25-pole

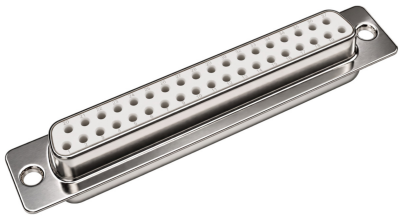

AI MODIFIED

General data

The D-Sub solder socket 9 pin from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a 180° connection angle, female contact design and suitability for round and flat cables, it supports compact and standard-compliant connectors in technical applications.

- 9-pin D-Sub solder socket for PCB mounting
- 180° design with soldering connection type for a stable PCB connection
- Female contact design for matching connectors with round and flat cable

Due to the temperature range of -40 to 70 °C, the EDF 09 LL/Z version is intended for different environments. The receptacle supports conductor cross-sections from 34AWG to 20AWG, making it suitable for applications where a precise and durable interface is required.

Technical details
- Type: EDF 09 LL /Z
- Connection type: Soldering
- Shooting angle: 180°
- Finish: Socket
- For cable type: round/flat
- Contact version: female
- Conductor cross-section: 34AWG ~ 20AWG
- Number of poles: 9
- Temperature range: -40 – 70 °C
- Brand: EFB-Elektronik
- Packaging: 50 pieces per blister

Technical properties

Conductor cross-section	34AWG ~ 20AWG

This datasheet was created automatically on 09-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Dsub Solder Jack EDF 25 LL/Z, 25-pole

Connection angle (180°/90°)	180
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
For cable type (round/flat)	round/flat
Model	jack
Temperature range	-40 – 70

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
28603.1	Dsub Solder Jack EDF 09 LL/Z, 09-pole	9	EDF 09 LL /Z	50 pieces per tray	2
28603.1V2	Dsub Solder Jack EDF 09 LL/Z, 09-pole	9	EDF 09 LL /Z	2	
28606.1	Dsub Solder Jack EDF 15 LL/Z, 15-pole	15	EDF 15 LL /Z	50 pieces per tray	2
28606.1V2	Dsub Solder Jack EDF 15 LL/Z, 15-pole	15	EDF 15 LL /Z	2	
28611.1	Dsub Solder Jack EDF 25 LL/Z, 25-pole.	25	EDF 25 LL /Z	50 pieces per tray	2
28611.1V2	Dsub Solder Jack EDF 25 LL/Z, 25-pole	25	EDF 25 LL /Z	2	
28614.1	Dsub Solder Jack EDF 37 LL/Z, 37-pole	37	EDF 37 LL /Z	40 pieces per tray	2
28617.1	Dsub Solder Jack EDF 50 LL/Z, 50-pole	50	EDF 50 LL /Z	40 pieces per tray	3

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION