
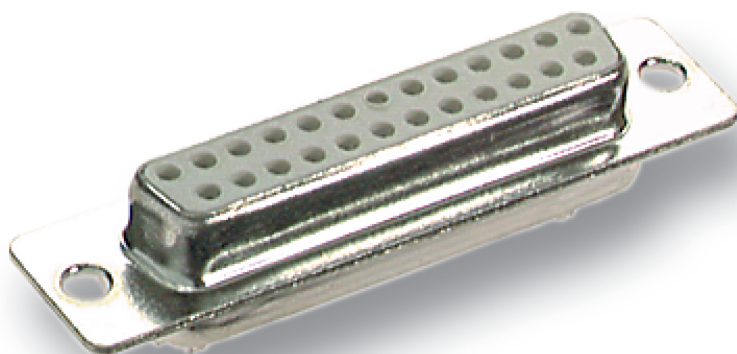


DATASHEET

Dsub Solder Jack EDF 37 LL/Z, 37-pole



General data

The 37-pin D-Sub solder socket from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a 180° connection angle, female contact design and suitability for round and flat cables, it supports compact and standard-compliant connectors in various applications.

- 37-pin D-Sub solder socket for PCB mounting
- 180° design with solder connection for PCB mounting
- Female contact design for a suitable plug connection

The conductor cross-section from 34AWG to 20AWG enables flexible processing in technical applications. With a temperature range of -40 to 70 °C, the bushing is designed for use in more demanding environments. The EDF 37 LL/Z version supports a stable signal connection in industrial and technical applications where a precise and permanently resilient interface is required.

Technical details

- Type: EDF 37 LL /Z
- Connection type: Soldering
- Shooting angle: 180°
- Finish: Socket
- For cable type: round/flat
- Contact version: female
- Conductor cross-section: 34AWG ~ 20AWG

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

Dsub Solder Jack EDF 37 LL/Z, 37-pole

- Number of poles: 37
- Temperature range: -40 – 70 °C
- Brand: EFB-Elektronik
- Packaging: 40 pieces per blister

Technical properties

Conductor cross-section	34AWG ~ 20AWG
Connection angle (180°/90°)	180
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
For cable type (round/flat)	round/flat
Model	jack
Temperature range	-40 – 70

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
28603.1	Dsub Solder Jack EDF 09 LL/Z, 09-pole	9	EDF 09 LL /Z	50 pieces per tray	2
28603.1V2	D-Sub Lötbuschse 09pol. EDF 09 LL /Z,	Unique			
28606.1	Dsub Solder Jack EDF 15 LL/Z, 15-pole	15	EDF 15 LL /Z	50 pieces per tray	2
28611.1	Dsub Solder Jack EDF 25 LL/Z, 25-pole.	25	EDF 25 LL /Z	50 pieces per tray	2
28614.1	Dsub Solder Jack EDF 37 LL/Z, 37-pole	37	EDF 37 LL /Z	40 pieces per tray	2
28617.1	Dsub Solder Jack EDF 50 LL/Z, 50-pole	50	EDF 50 LL /Z	40 pieces per tray	3

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

