
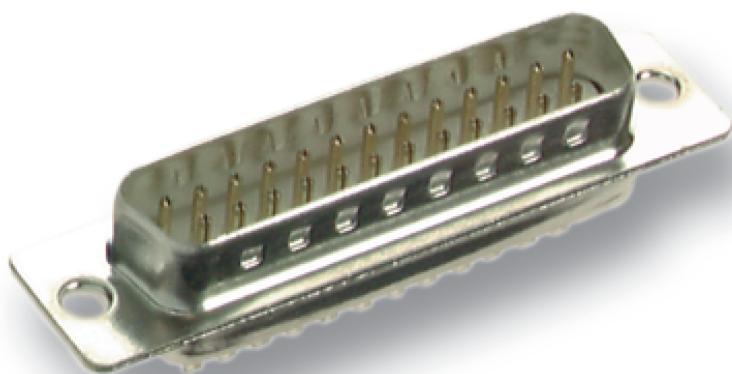


DATASHEET

Dsub Solder Plug EDS 09 LL/Z, 37-pole



General data

The 37-pin D-Sub solder connector from EFB-Elektronik is designed for a reliable solder connection and is suitable for round and flat cables. With a 180° mounting angle and male contact design, it supports compact and standard-compliant connectors in a variety of applications.

- 37-pin D-Sub solder connector for round and flat cables
- 180° design with solder connection for cable mounting
- Male contact design for matching connectors

Due to the temperature range of -40 to 70 °C, the connector is designed for defined operating conditions. The EDS 37 LL /Z version supports a stable signal connection in technical applications where a precise and permanently resilient interface is required.

Technical details

- Type: EDS 37 LL /Z
- Connection type: Soldering
- Shooting angle: 180°
- Type: Plug
- For cable type: round/flat
- Contact version: male
- Conductor cross-section: 34AWG ~ 20AWG
- Number of poles: 37

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

Dsub Solder Plug EDS 09 LL/Z, 37-pole

- Temperature range: -40 – 70 °C
- Brand: EFB-Elektronik
- Packaging: 40 pieces per blister

Technical properties

Conductor cross-section	34AWG ~ 20AWG
Connection angle (180°/90°)	180
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	male
For cable type (round/flat)	round/flat
Model	plug
Temperature range	-40 – 70

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
28653.1	Dsub Solder Plug EDS 09 LL/Z, 09-pole	9	EDS 09 LL /Z	50 pieces per tray	2
28656.1	Dsub Solder Plug EDS 15 LL/Z, 15-pole	15	EDS 15 LL /Z	50 pieces per tray	2
28661.1	Dsub Solder Plug EDS 09 LL/Z, 25-pole	25	EDS 25 LL /Z	50 pieces per tray	2
28664.1	Dsub Solder Plug EDS 09 LL/Z, 37-pole	37	EDS 37 LL /Z	40 pieces per tray	2
28667.1	Dsub Solder Plug EDS 09 LL/Z, 50-pole	50	EDS 50 LL /Z	40 pieces per tray	3

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

