


DATASHEET

Dsub Jack for Print mounting EDF 09 PP, 37-pole

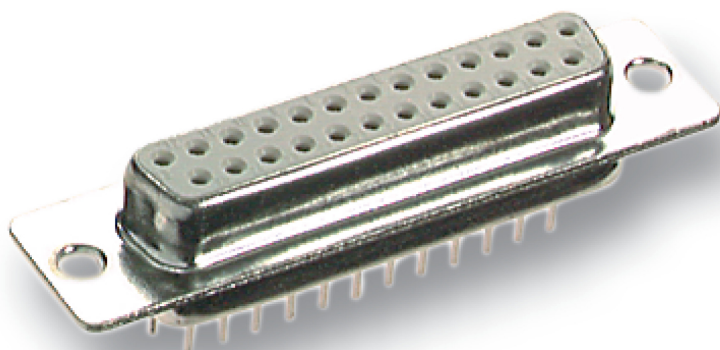

General data

The 37-pin D-Sub socket from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a 180° connection angle and female contact design, it is suitable for standard-compliant connectors in compact applications.

- 37-pin D-Sub socket for PCB mounting
- 180° design with solder connection for PCB mounting
- Female contact design for a suitable plug connection

The temperature range of -55 to 105 °C supports use in demanding environments. The EDF 37 PP version is designed for a stable signal connection and is suitable for industrial and technical applications where a permanently resilient interface is required.

Technical details

- Type: EDF 37 PP
- Connection type: Soldering
- Shooting angle: 180°
- Finish: Socket
- Contact version: female
- Number of poles: 37
- Temperature range: -55 – 105 °C
- Brand: EFB-Elektronik
- Packaging: 40 pieces per blister

Technical properties

Connection angle (180°/90°)	180
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	female

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.



DATASHEET

Dsub Jack for Print mounting EDF 09 PP, 37-pole

Model	jack
Temperature range	-55 - 105

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
28712.1	Dsub Jack for Print mounting EDF 09 PP, 37-pole	37	EDF 37 PP	40 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

