


DATASHEET

Dsub Jack, IDC contacts, flat 09-pole, E-DFF 09 LP III/Z UNC

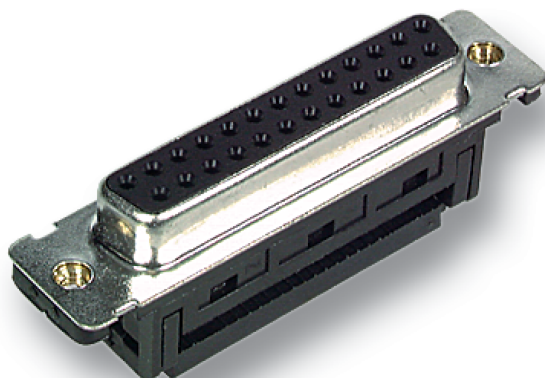

General data

The D-Sub socket 9 pin from EFB-Elektronik is designed for reliable insulation displacement on flat cables. With a 180° connection angle, female contact design and UNC thread, it is suitable for compact and standard-compliant connectors in a wide range of applications.

- 9-pin D-sub socket for flat cables
- 180° design with insulation clamp for connection from 28AWG to 26AWG
- Female contact design for a suitable plug connection

The temperature range of -25 to 85 °C makes the bushing designed for more demanding environments. The EDFF 09 LP III/Z UNC version supports a stable signal connection in industrial and technical applications where a precise and permanently resilient interface is required.

Technical details

- Type: EDFF 09 LP III/Z UNC
- Connection type: other
- Shooting angle: 180°
- Finish: Socket
- For cable type: flat
- Contact version: female
- Conductor Cross Section: 28AWG ~ 26AWG
- Number of poles: 9
- Temperature range: -25 – 85 °C
- Brand: EFB-Elektronik
- Packaging: 90 pieces per blister

Technical properties

Conductor cross-section	28AWG ~ 26AWG
-------------------------	---------------

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.



DATASHEET

Dsub Jack, IDC contacts,flat 09-pole,E-DFF 09 LPIII/Z UNC

Connection angle (180°/90°)	180
Connection type	Other
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
For cable type (round/flat)	flat
Model	jack
Temperature range	-25 - 85

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29015.1	Dsub Jack, IDC contacts,flat 09-pole,E-DFF 09 LPIII/Z UNC	9	EDFF 09 LPIII/Z UNC	90 pieces per tray	2
29017.1	Dsub Jack, IDC contacts,flat 25-pole,E-DFF 09 LPIII/Z UNC	25	EDFF 25 LPIII/Z UNC	40 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.

