


DATASHEET

Dsub Jack, IDC contacts, flat, 25-pole, E-DFF 09 LPIII/Z UNC

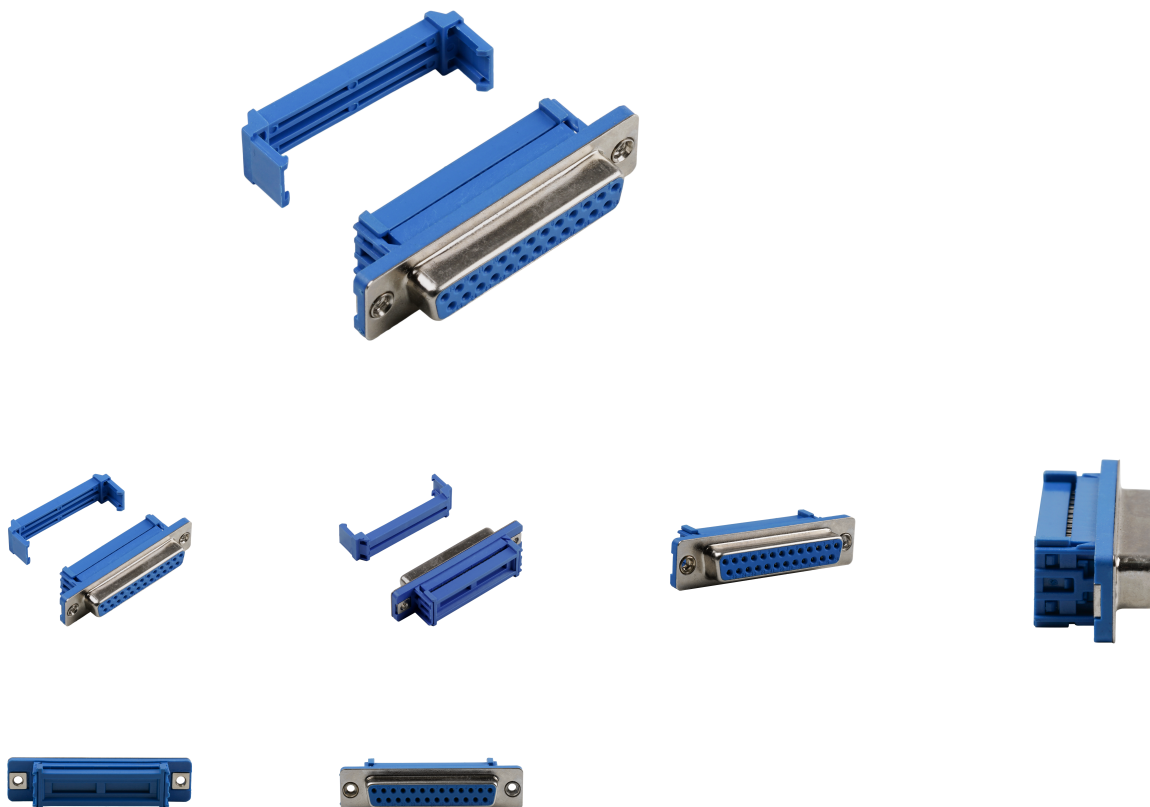

General data

- Quality level III
- UNC thread
- 50 mating cycles

Technical properties

Conductor cross-section	28AWG ~ 26AWG
Connection angle (180°/90°)	180
Connection type	Other
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
For cable type (round/flat)	flat
Model	jack

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.



DATASHEET

Dsub Jack, IDC contacts, flat, 25-pole, E-DFF 09 LPIII/Z UNC

Temperature range	-25 - 85
-------------------	----------

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29017.1V2	Dsub Jack, IDC contacts, flat, 25-pole, E-DFF 09 LPIII/Z UNC	25	EDFF 25 LPIII/Z UNC	40 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

