


DATASHEET

DSub Plug, IDC contacts flat, version, E-DFF 15 LPIII/Z

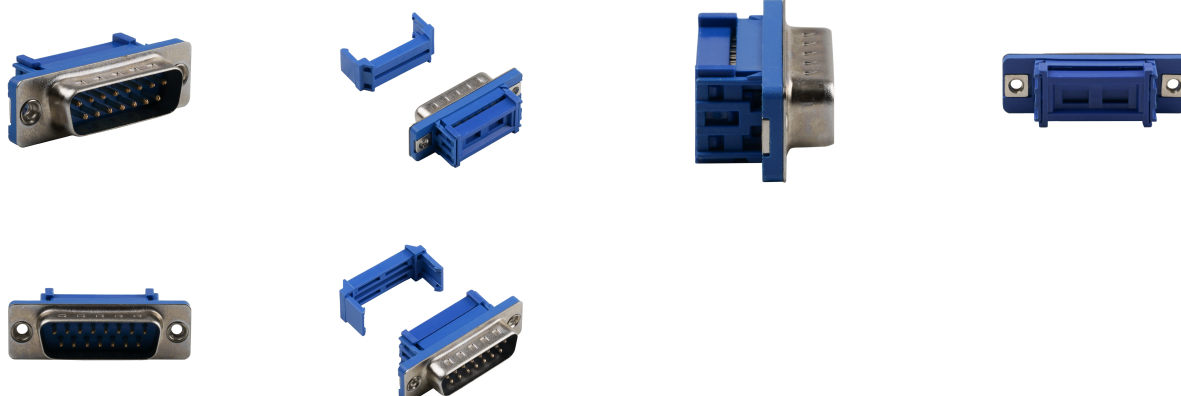

General data

Gütestufe III. ≥ 50 Steckzyklen.

Kontakmaterial: Vernickeltes Messing vergoldet

Technical properties

Conductor cross-section	28AWG ~ 26AWG
Connection angle (180°/90°)	180
Connection type	Other
Contact manufacturing method (turned/stamped)	stamped
Contact type	male
For cable type (round/flat)	flat
Model	plug

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.



DATASHEET

DSub Plug, IDC contacts flat, version, E-DFF 15 LPIII/Z

Temperature range -25 - 85

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29061.1V2	DSub Plug, IDC contacts flat, version, E-DFF 15 LPIII/Z	15	EDSF 15 LPIII/Z	70 Stück pro Blister	2
29062.1V2	DSub Plug, IDC contacts flat, version, E-DFF 25 LPIII/Z	25	EDSF 25 LPIII/Z	40 Stück pro Blister	2
29063.1V2	DSub Plug, IDC contacts flat, version, E-DFF 37 LPIII/Z	37	EDSF 37 LPIII/Z	30 Stück pro Blister	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

