


DATASHEET

DSub Plug, IDC contacts, flat 09-pole, E-DSF 09 LPIII/Z UNC

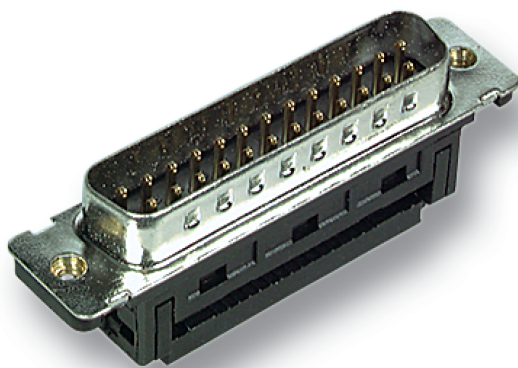

General data

The D-Sub connector 9 pin with insulation displacement connection from EFB-Elektronik is designed for mounting on flat cables. With a 180° connection angle, male contact design and UNC thread, it is suitable for compact and standard-compliant connectors in various applications.

- 9-pin D-Sub connector for flat cables
- 180° design with insulation displacement connection and UNC thread
- Male contact design for matching connectors

Due to the temperature range of -25 to 85 °C, the connector is designed for technical environments. The EDSF 09 LPIII/Z UNC version supports a resilient connection in industrial and technical applications where a precise interface is required. The permissible conductor cross-section from 28AWG to 26AWG is adapted to flat cables with corresponding dimensions.

Technical details

- Type: EDSF 09 LPIII/Z UNC
- Shooting angle: 180°
- Type: Plug
- For cable type: flat
- Contact version: male
- Conductor Cross Section: 28AWG ~ 26AWG
- Number of poles: 9
- Temperature range: -25 – 85 °C
- Brand: EFB-Elektronik
- Packaging: 90 pieces per blister

Technical properties

Conductor cross-section

28AWG ~ 26AWG

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

DSUB Plug, IDC contacts, flat 09-pole, E-DSF 09 LP III/Z UNC

Connection angle (180°/90°)	180
Connection type	Other
Contact manufacturing method (turned/stamped)	stamped
Contact type	male
For cable type (round/flat)	flat
Model	plug
Temperature range	-25 - 85

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29065.1	DSUB Plug, IDC contacts, flat 09-pole, E-DSF 09 LP III/Z UNC	9	EDSF 09 LP III/Z UNC	90 pieces per tray	2
29067.1	DSUB Plug, IDC contacts, flat 25-pole, E-DSF 09 LP III/Z UNC	25	EDSF 25 LP III/Z UNC	40 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

