DATASHEET

DSub Plug, IDC contacts,flat 25-pole,E-DSF 09 LPIII/Z UNC

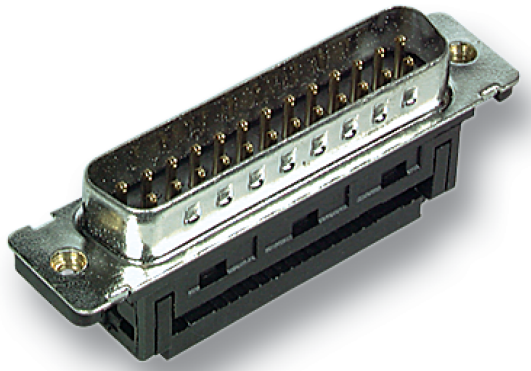

General data

The 25-pin D-Sub connector with insulation terminal from EFB-Elektronik is designed for flat cables and supports a reliable connection with UNC thread. With a 180° connection angle and male contact design, it is suitable for compact connectors in technical applications.

- 25-pin D-Sub connector for flat cables
- 180° design with insulation clamp and UNC thread
- Male contact design for matching connectors

The EDSF 25 LPIII/Z UNC version is intended for conductor cross-sections from 28AWG to 26AWG and thus supports use in corresponding cable applications. The temperature range of -25 to 85 °C extends the range of applications to more demanding environments where a stable and resilient interface is required.

Technical details
- Type: EDSF 25 LPIII/Z UNC
- Connection type: other
- Shooting angle: 180°
- Type: Plug
- For cable type: flat
- Contact version: male
- Conductor Cross Section: 28AWG ~ 26AWG
- Number of poles: 25
- Temperature range: -25 – 85 °C
- Brand: EFB-Elektronik
- Packaging: 40 pieces per blister

Technical properties

Conductor cross-section	28AWG ~ 26AWG

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

DSub Plug, IDC contacts,flat 25-pole,E-DSF 09 LPIII/Z UNC

Connection angle (180°/90°)	180
Connection type	Other
Contact manufacturing method (turned/stamped)	stamped
Contact type	male
For cable type (round/flat)	flat
Model	plug
Temperature range	-25 – 85

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29065.1	DSub Plug, IDC contacts,flat 09-pole,E-DSF 09 LPIII/Z UNC	9	EDSF 09 LPIII/Z UNC	90 pieces per tray	2
29067.1	DSub Plug, IDC contacts,flat 25-pole,E-DSF 09 LPIII/Z UNC	25	EDSF 25 LPIII/Z UNC	40 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION