


DATASHEET

DSub Jack 7.2mm, USA stand. angled, E-DF 09A-KGT2

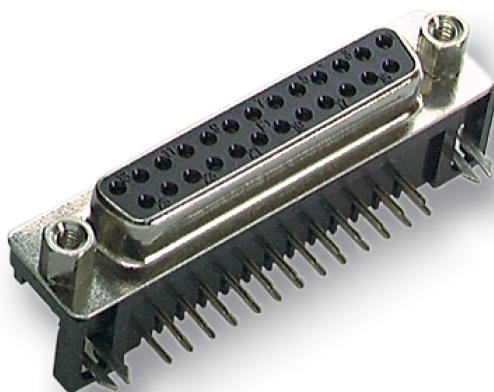

General data

The D-Sub socket 9 pin 7.2 mm from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a 90° connection angle and female contact design, it is suitable for compact and standard-compliant connectors in various applications.

- 9-pin D-Sub socket for compact signal connections
- 90° design with solder connection for PCB mounting
- Female contact design for a suitable plug connection

With a temperature range of -55 to 105 °C, the bushing is designed for demanding environments. The EDF 09A-KGT2 version supports a stable signal connection in industrial and technical applications where a precise and permanently resilient interface is required.

Technical details

- Type: EDF 09A-KGT2
- Connection type: Soldering
- Shooting angle: 90°
- Finish: Socket
- Contact version: female
- Number of poles: 9
- Temperature range: -55 – 105 °C
- Brand: EFB-Elektronik
- Packaging: 90 pieces per blister

Technical properties

Connection angle (180°/90°)	90
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

DSUB Jack 7.2mm, USA stand. angled, E-DF 09A-KGT2

Contact type	female
Model	jack
Temperature range	-55 - 105

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29226.2	DSUB Jack 7.2mm, USA stand. angled, E-DF 09A-KGT2	9	EDF 09A-KGT2	90 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

