


DATASHEET

DSub Jack 7.2mm, USA stand. angled, E-DF, 09A-KGT2

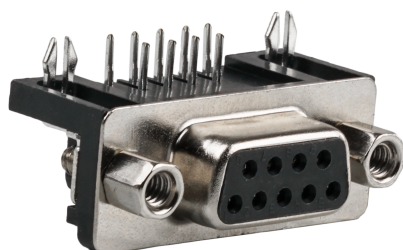

General data

- Quality level III
- UNC 4-40 bolts
- PushFit snap-in fastening element

Technical properties

Connection angle (180°/90°)	90
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	female
Model	jack
Temperature range	-55 - 105

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

DATASHEET

DSub Jack 7.2mm, USA stand. angled, E-DF, 09A-KGT2

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
29226.2V2	DSub Jack 7.2mm, USA stand. angled, E-DF, 09A-KGT2	9	EDF 09A-KGT2	90 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

