


DATASHEET

Full Metal Cover 180°, E-MHDM 09-K

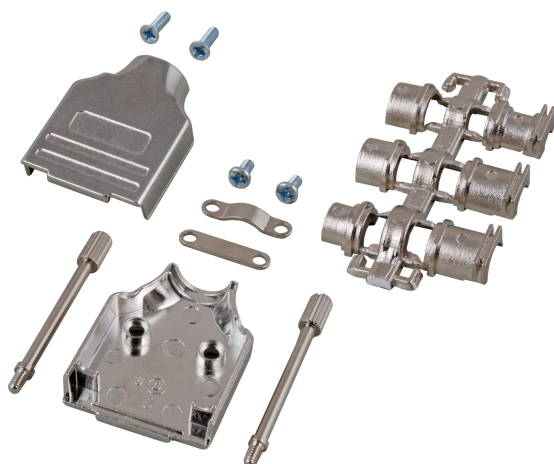

General data

The D-Sub full metal hood E-MHDM 09-K in silver from EFB-Elektronik is designed as a full metal hood for 9-pin connectors. With a 180° cable outlet and straight cable entry, it is suitable for compact and standard-compliant cable connections in technical applications.

- Full metal design made of die-cast zinc in silver
- Suitable for 9-pin D-Sub connectors
- Cable outlet 180° with straight cable entry

The material zinc die casting supports a robust and practical protection solution for technical applications where a precisely fitting cover for D-Sub interfaces is required. The temperature range of -40 to 120 °C and the maximum cable diameter of 13 mm take into account demanding operating conditions and common cables.

Technical details

- Type: E-MHDM 09-K
- Material: Zinc die casting
- Colour: silver
- Suitable for Number of Poles: 9
- Cable entry: straight
- Temperature range: -40 - 120 °C
- Max. cable diameter: 13 mm
- Brand: EFB-Elektronik

Technical properties

Locking mechanism	Screw
Material	zinc die-cast
Separable	True
Temperature range	-40 - 120 °C

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

Full Metal Cover 180°, E-MHDM 09-K

Two piece

True

Available variants

ArtNr.	Bezeichnung	Cable Entry	Cable diameter	Colour	Suitable for number of poles	Type	LxWxH
29470.1	Full Metal Cover 180°, E-MHDM 09-K	Straight	13 mm	silver	9	E-MHDM 09-K	32 x 41 x 15
29471.1	Full Metal Cover 180°, E-MHDM 15-K	Straight	13 mm	silver	15	E-MHDM 15-K	40 x 43 x 15
29472.1	Full Metal Cover 180°, E-MHDM 25-K	Straight	13 mm	silver	25	E-MHDM 25-K	54 x 50 x 15

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

