


DATASHEET

HD-DSub Solder Plug E-HDS 62 LL/Z

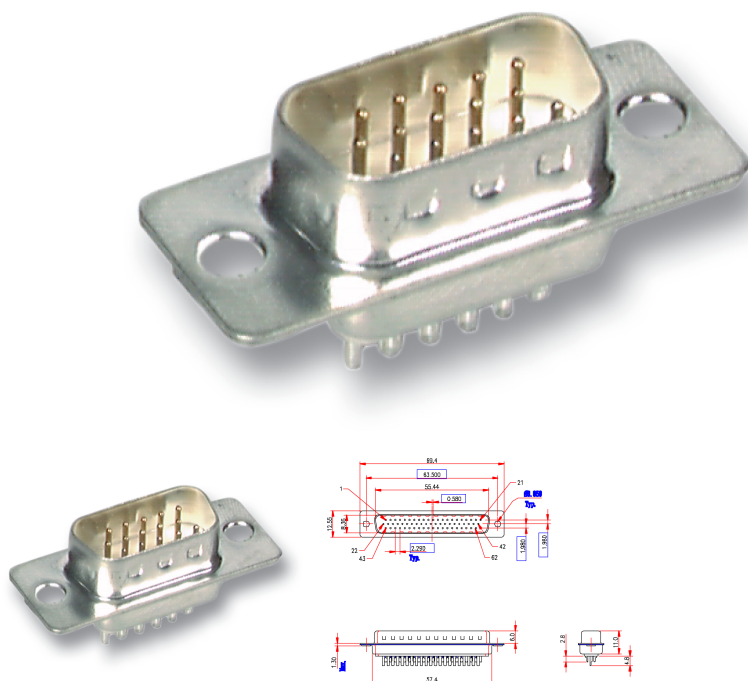

General data

The HD D-Sub 62-pin solder connector from EFB-Elektronik is designed for a reliable solder connection. With a 180° connection angle and male contact design, it is suitable for compact connectors in circular cable applications.

- 62-pin HD D-Sub solder connector
- 180° design with solder connection for connecting circular cables
- Male contact design for matching connectors

With a temperature range of -55 to 105 °C, the E-HDS 62 LL/Z version is designed for demanding environments. The combination of a high number of poles and soldered connection type supports a precise and permanently resilient signal connection in technical applications.

Technical details

- Type: E-HDS 62 LL/Z
- Connection type: Soldering
- Shooting angle: 180°
- Type: Plug
- For cable type: round
- Contact version: male
- Number of poles: 62
- Temperature range: -55 - 105 °C

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

HD-DSub Solder Plug E-HDS 62 LL/Z

- Brand: EFB-Elektronik
- Packaging: 40 pieces per blister

Technical properties

Conductor cross-section	34AWG ~ 22AWG
Connection angle (180°/90°)	180
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped
Contact type	male
For cable type (round/flat)	round/flat
Model	plug
Temperature range	-40 - 70

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
34504.1	HD-DSub Solder Plug E-HDS 15 LL/Z	15	E-HDS 15 LL/Z	50 pieces per tray	3
34506.1	HD-DSub Solder Plug E-HDS 62 LL/Z	62	E-HDS 62 LL/Z	40 pieces per tray	3
34509.1	HD-DSub Solder Plug E-HDS 26 LL/Z	26	E-HDS 26 LL/Z	50 pieces per tray	3

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

