


DATASHEET

DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1

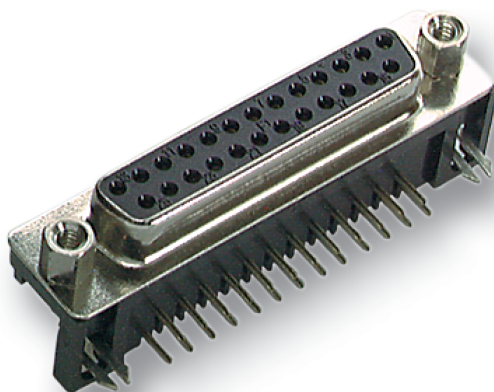

General data

The 15-pin D-Sub socket with 90° connection angle in EURO version from EFB-Elektronik is designed for a reliable solder connection on the PCB. With a female contact design, it is suitable for compact and standard-compliant connectors in various applications.

- 15-pin D-Sub socket for compact connectors
- 90° design with solder connection for PCB mounting
- Female contact version in the EURO variant

With a temperature range of -55 to 105 °C, the bushing is designed for demanding environments. The EDF 15 A/KG-T1 version supports a stable signal connection in technical applications where a precise and permanently resilient interface is required.

Technical details

- Type: EDF 15 A/KG-T1
- Connection type: Soldering
- Shooting angle: 90°
- Finish: Socket
- Contact version: female
- Number of poles: 15
- Temperature range: -55 – 105 °C
- Brand: EFB-Elektronik
- Packaging: 70 pieces per blister

Technical properties

Connection angle (180°/90°)	90
Connection type	Solder
Contact manufacturing method (turned/stamped)	stamped

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.



DATASHEET

DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1

Contact type	female
Model	jack
Temperature range	-55 - 105

Available variants

ArtNr.	Bezeichnung	Number of poles	Type	Packaging	Numbrt of rows
34701.1	DSub Jack 9.4mm Euro Standard, EDF 09 A/KG-T1	9	EDF 09 A/KG-T1	90 pieces per tray	2
34702.1	DSub Jack 9.4mm Euro Standard, EDF 15 A/KG-T1	15	EDF 15 A/KG-T1	70 pieces per tray	2

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

