




DATASHEET

Keystone snap in adapter RJ45 STP, Cat.6A, 90° zinc die-cast housing D=40mm

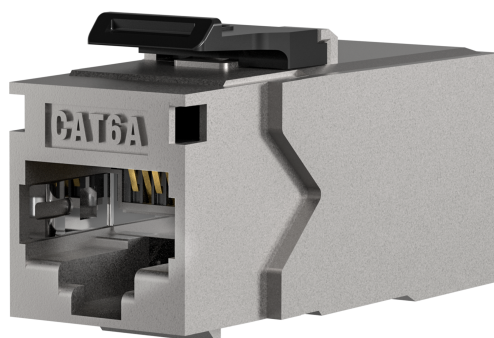

General data

Snap-In mounting (Keystone)
Cat.6A
Connecting adapter for patch cables
2x RJ45 connectors shielded, with on one side 90° entry
Allocation: 1:1
Stainless steel housing
Depth: 40mm

Technical properties

Assembly	Keystone
Category	6A (IEC)
Construction type	straight
Mating cycles	≥ 750
Model	jack/jack
Temperature Range (Operation)	0 - 70 °C
Type of connector	2x RJ45

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.



DATASHEET

Keystone snap in adapter RJ45 STP, Cat.6A, 90° zinc die-cast housing D=40mm

Available variants		
ArtNr.	Bezeichnung	screened
37483.2	Keystone snap in adapter RJ45 STP, Cat.6A, 90° zinc die-cast housing D=40mm	True

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.

