


DATASHEET

19" Subrack 3U for LSA Modules 8pairs & 10pairs

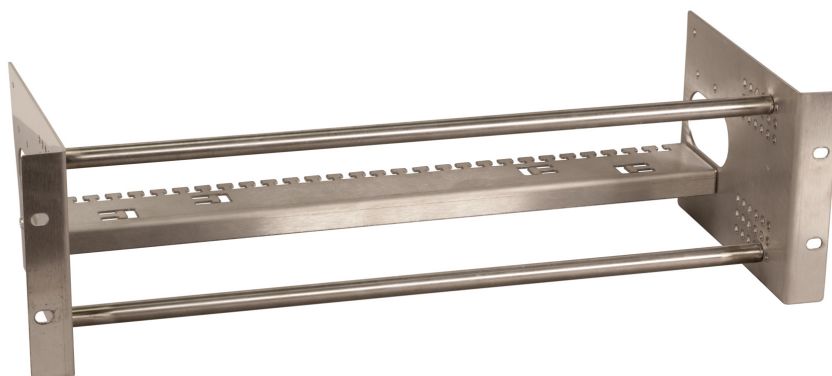

General data

With 2 horizontal mounting rods 12 mm stainless steel, depth-adjustable
 For accommodation of up to 18 LSA modules 10pairs and 8pairs vertically
 Cable infeed from rear or side possible
 Rear-sided cable clamping
 Earth connection with nut M6 on the side part
 Front-sided cable clamping optionally, e.g. for DSLAM cable: Art.-No. 46054.2A
 Material stainless steel
 Weight 0.5 kg

Technical properties

Material	Metal
Model	Subrack
Structure/Use	LSA strip installation

Available variants

ArtNr.	Bezeichnung	Colour	Suitable for enclosure building height	Suitable for enclosure building width	Width	Height	Weight
46054.2	19" Subrack 3U for LSA Modules 8pairs & 10pairs	stainless steel	3 U	19 "	480 mm	129 mm	0.5 kg

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 24-10-2026 . Technical changes reserved.

