


DATASHEET

Connector LC/APC SM 2.0mm Connector (green) Boot (green)

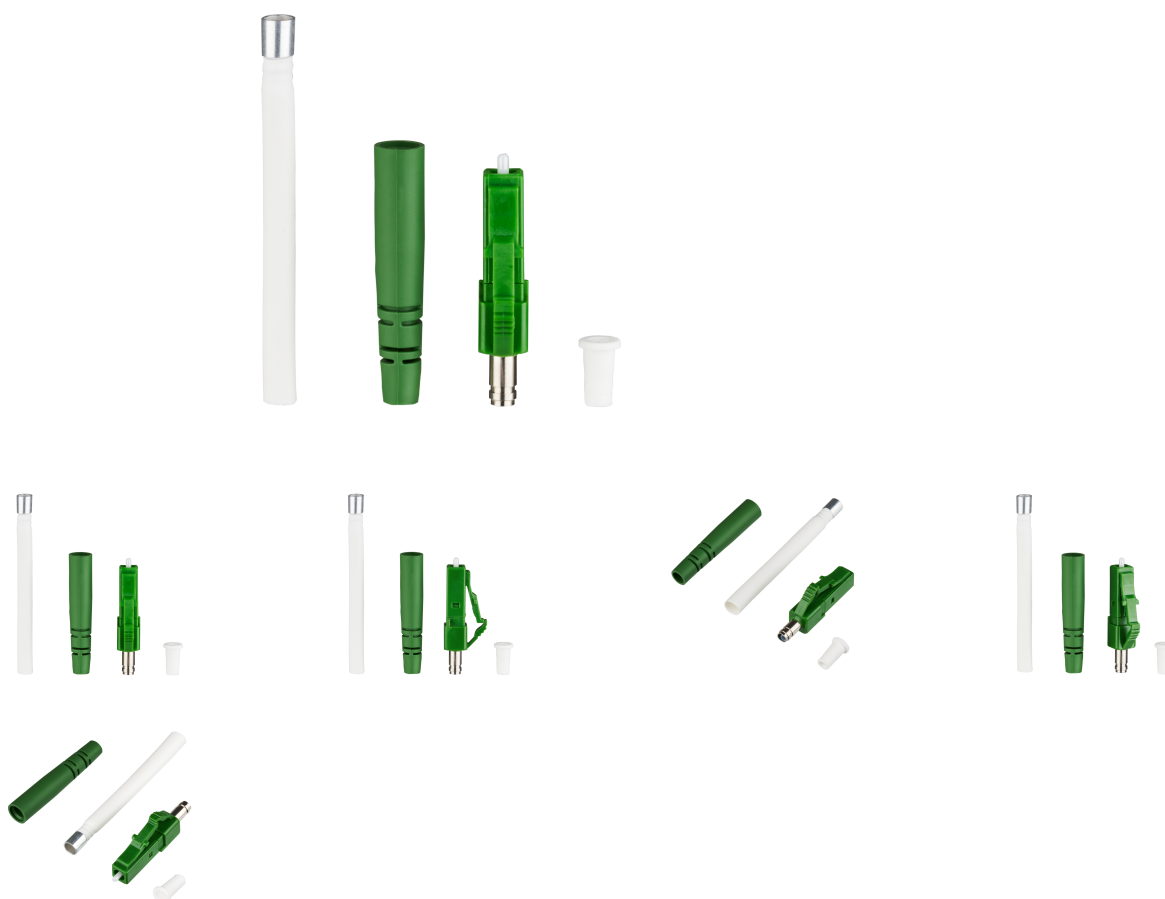

General data

LC/APC8°-connector singlemode

Technical properties

Connection type	Crimping
Durability	< 0.2db at 500 connection cycles
Inner diameter of the ferrule	126 µm
Material of ferrule	Circonia
Model	Plug
Operating temperature	-40 - 75 °C
Packaging	Polybag

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



DATASHEET

Connector LC/APC SM 2.0mm Connector (green) Boot (green)

Scope of delivery	1x LC/APC Connector Kit, 1x LC Boot
Storage Temperature	-40 - 75 °C
Type of connector	LC/APC

Available variants

ArtNr.	Bezeichnung	Anti-kink sleeve	Cable Ø	Colour	Suitable for type of fibre	Ferrule angle	Grommet length	Ferrule outer diameter	Typ. insertion Loss	Max. insertion Loss	Ferrule inner diameter	Return Loss
53232.7	Connector LC/APC SM 2.0mm Connector (green) Boot (green)	green	2 mm	Green	Single mode	8° APC	28.5 mm	1.25 mm	≤0.25 dB	≤0.30 dB	125.5-126.5 µm	≥60 dB

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

