





DATASHEET

Adapter SC/APC Duplex OS2 green with shutter

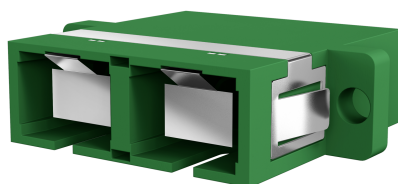

General data

LC Duplex adapters in coloured plastic housing. Suitable for SC-Duplex cut-outs. The couplings are equipped with an internal laser shutter. Fastening options via clips, also via sheet metal or threaded screws these are available as accessories.

Technical properties

Accessories	Self-Tapping Screw
Colour Dust Cover	Black
Conform to Standard	IEC61754-4
Construction type	SC-Duplex
Dust cover	True
Height	9.3 mm
Internal Shutter	True
Length	27.5 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 - 75 °C
Packaging	Polybag
Scope of deliveryLieferumfang	1 coupling, 2 screws

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



DATASHEET

Adapter SC/APC Duplex OS2 green with shutter

Storage Temperature	-40 – 85 °C
Type of connector connection 1	SC-Duplex
Type of connector connection 2	SC-Duplex
Type of fastening	Screw/snap in
Type of housing	With flange
Type of locking	Latching mechanism
Width	35.0 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 1310nm	Model	Suitable for type of fibre
53316.36	Adapter SC/APC Duplex OS2 green with shutter	OS2	Green	< 0,2 dB	SC/APC	Single mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

