




DATASHEET

Adapter SC Simplex OM3 aqua flangeless

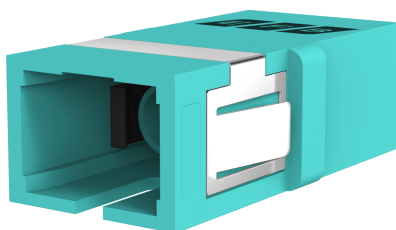

General data

- Flangeless adapter are good for high density and could be used as keystone modules in consumption with keystone adapter frames

Technical properties

Colour Dust Cover	Black
Conform to Standard	IEC61754-4
Construction type	SC-Simplex
Dust cover	True
Height	9.3 mm
Internal Shutter	False
Length	27.5 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 - 75 °C
Packaging	Polybag
Storage Temperature	-40 - 85 °C
Type of connector connection 1	SC

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.



DATASHEET

Adapter SC Simplex OM3 aqua flangeless

Type of connector connection 2	SC
Type of fastening	Engage (snap)
Type of housing	flangeless
Type of locking	Latching mechanism
Width	14.7 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 850nm	Model	Suitable for type of fibre
53512.1	Adapter SC Simplex OM3 aqua flangeless	OM3	aqua	< 0,2 dB	SC	Multi mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.

