



DATASHEET

Adapter LC Duplex OS2 blue flangeless

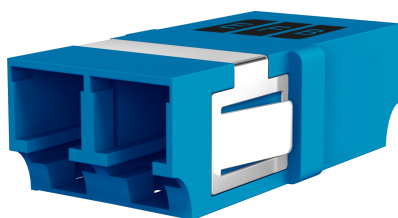

General data

- Flangeless adapter are good for high density and could be used as keystone modules in consumption with keystone adapter frames

Technical properties

Conform to Standard	IEC61754-20
Construction type	SC-Simplex
Dust cover	True
Height	9.3 mm
Internal Shutter	False
Length	24 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 - 85 °C
Storage Temperature	-40 - 85 °C
Type of connector connection 1	LC-Duplex
Type of connector connection 2	LC-Duplex
Type of fastening	Engage (snap)

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.



DATASHEET

Adapter LC Duplex OS2 blue flangeless

Type of housing	flangeless
Width	14.7 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 1310nm	Model	Suitable for type of fibre
53515.1	Adapter LC Duplex OS2 blue flangeless	OS2	blue	≤0,15 dB	LC	Single mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.

