


DATASHEET

R&M adapter E2000™ Duplex/Comact OM3 aqua Grade M

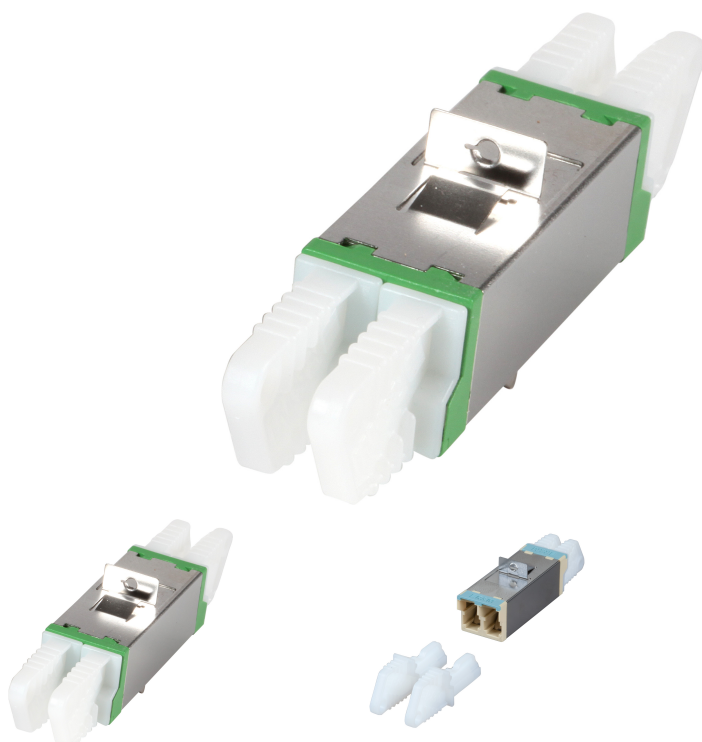

General data

E2000® Duplex Compact Adapter Singlemode

Technical properties

Accessories	Metric Bold
Colour Dust Cover	semi-transparent
Conform to Standard	IEC61754-15
Construction type	SC-Duplex
Dust cover	True
Height	13 mm
Internal Shutter	False
Length	42 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-25 - 70 °C
Scope of deliveryLieferumfang	1 coupling, 2 screws
Storage Temperature	-25 - 70 °C
Type of connector connection 1	E2000® compact

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.



DATASHEET

R&M adapter E2000™ Duplex/Comact OM3 aqua Grade M

Type of connector connection 2	E2000® compact
Type of fastening	Screw
Type of housing	With flange
Type of locking	Latching mechanism
Width	22.8 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 850nm	Model	Suitable for type of fibre
53525.1	R&M adapter E2000™ Duplex/Comact OM3 aqua Grade M	OM3	aqua	< 0,2 dB	E2000	Multi mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.

