


DATASHEET

R&M adapter E2000™ /APC Simplex OS2 green Grade C flangeless

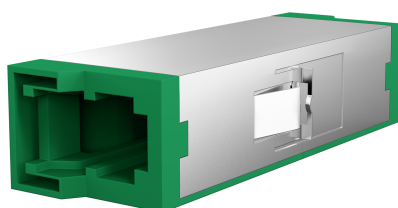

General data

- E2000® APC green adapter (RdM) with ceramic sleeve
- Housing material white or black

Technical properties

Colour Dust Cover	semi-transparent
Conform to Standard	IEC61754-15
Construction type	SC-Simplex
Dust cover	True
Height	13 mm
Internal Shutter	True
Length	42 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-25 - 70 °C
Storage Temperature	-25 - 70 °C
Type of connector connection 1	E2000®

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.



DATASHEET

R&M adapter E2000™ /APC Simplex OS2 green Grade C flangeless

Type of connector connection 2	E2000™
Type of fastening	Engage (snap)
Type of housing	flangeless
Type of locking	Latching mechanism
Width	9.35 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 1310nm	Model	Suitable for type of fibre
53526.1	R&M adapter E2000™ /APC Simplex OS2 green Grade C flangeless	OS2	Green	< 0,2 dB	E2000/APC	Single mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.

