


# DATASHEET

## FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 20m

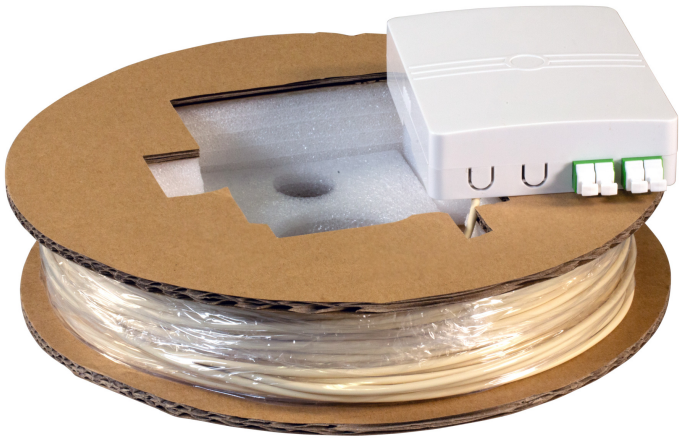





### General data

Pre Assembled House Connection Box with a 4 fiber installation cable

**Bend insensitive fiber for smaller bending radii**
Cable entry: rear side
Pigtails spliced and connected
Outgoing Port: 4
Installation cable coiled on cardboard roll

### Technical properties

| | |
|---|---|
| APC-version | True |
| Adapter | LC Duplex |
| Adapter colour | green |
| Blow in | True |
| Cable & Fiber | IEC 60794-2-20 |
| Cable Diameter | 2.2 mm |
| Cable entry without cable gland | 2 |
| Cable sheath support | False |
| Cabling standards | ISO/IEC 11801 |

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

# DATASHEET

## FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 20m

| | |
|---|---|
| Colour | white |
| Colour outer sheath | white |
| Dimensions | 100x80x22 mm |
| Fibre category | G657.A2 |
| Fibre type | Single mode 9/125 |
| Flame retardant | Yes |
| Foreign body and contact protection | Protection against medium-sized foreign bodies |
| Halogen free | True |
| Hinged splice cassette | True |
| Holder for gas blocker | False |
| Holder for splitter | False |
| IL max. (dB/km) 1310nm | 0.35 dB/km |
| IL max. (dB/km) 1550nm | 0.21 dB/km |
| IP Protection | IP20 |
| Low smoke | True |
| Material | Plastic halogen free |
| Material outer sheath | LSZH |
| Mounting method | Wall mounting |
| Operating Temperature | -20 – 60 °C |
| Possibility of mast mounting | False |
| Quantity adapter | 2 |
| Quantity of Pigtails | 4 |
| Scope of application | Indoor |
| Strain relief | True |
| Water protection | Without protection |
| With Fiber overlength cassette | True |
| With plug protection | False |

**Available variants**

| ArtNr. | Bezeichnung | Length |
|---|---|---|
| 53670.10 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 10m | 10.0 m |
| 53670.20 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 20m | 20.0 m |
| 53670.30 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 30m | 30.0 m |
| 53670.40 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 40m | 40.0 m |
| 53670.50 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 50m | 50.0 m |

**This datasheet was created automatically on 01-11-2026 . Technical changes reserved.**

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

# DATASHEET

## FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 20m

| | | |
|---|---|---|
| 53670.60 | FTTX Compact Box pre assembled, 2x LC/APC Duplex, G.657.A2, 60m | 60.0 m |

**Note on Intended Use**

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.



EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION