


DATASHEET

I-V(ZN)H Duplex-Zipcord OS2 2E (2x1) 400N LSZH yellow 1.8x3.7mm G657A1

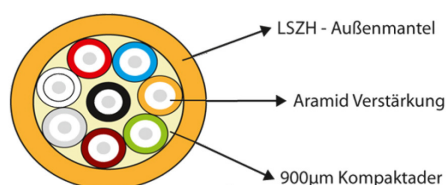

General data

Indoor application
Tertiary cabling (horizontal) : working area, fiber-to-the-desk (FTTD)
Patch- and adapter cable
Indoor cable
Non-metallic, halogenfree
Suitable for field installable connectors

Technical properties

Application	Inside
Armouring	False
Blow in	False
Cable & Fiber	IEC 60794-2
Cable metal free	True
Cable silicone free	True
Circuit integrity	False
Colour outer sheath	yellow
Crush resistance	200 N/dm
Fiber Colours	white
Fiber marking	Colour
Fibre category	OS2 G657A1
Fibre type	Single mode 9/125
Flame retardant	According to EN 60332-1-2
Halogen free	acc. to EN 60754-1/2

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.



DATASHEET

I-V(ZN)H Duplex-Zipcord OS2 2E (2x1) 400N LSZH yellow 1.8x3.7mm G657A1

Harmonised Standard	-
IL max. (dB/km) 1310nm	0.4 dB/km
IL max. (dB/km) 1550nm	0.30 dB/km
Longitudinal water blocking	False
Low smoke	True
Material outer sheath	LSZH
Oil resistant	no
Radial water blocking	False
Resistant to chemicals	False
Scope of delivery	1x Cable1x Drum
Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Operation)	-5 - 70 °C
Temperature Range (Storage)	-25 - 70 °C
Tube Ø	1.8 x 3.7 mm
Type of tube	Tight
UV resistant	no
With rodent protection	False
With strain relief	True

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Number of fibres per tube	Construct	Suitable for underground installation	Outer diameter approx.	Fire load	Minimum bending radius (dynamic)	VDE-Name	Weight	Minimum bending radius (static)
56203.1	I-V(ZN)H Duplex-Zipcord OS2 2E (2x1) 400N LSZH yellow 1.8x3.7mm G657A1	1.8 x 3.7 mm	OS2	2	400 N	1	(2x1)	False	1.8 x 3.7 mm	0.20 MJ/m	20xOD mm	I-V(ZN)H 2E9/125	7.4 kg/km	10xOD mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.

