


DATASHEET

**INFRALAN® I-B(ZN)BH OM3 24G (2x12) B2ca 3000N LSZH
aqua 8.3mm**

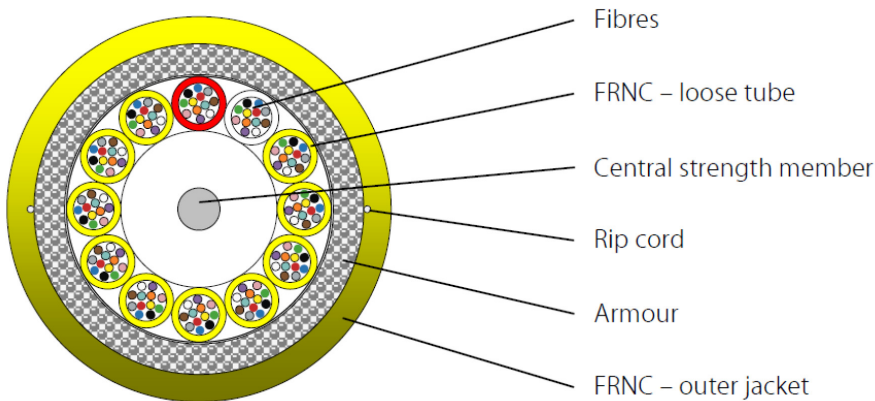

General data

Fields of application:
For building connections
For campus cabling
For use in plastic pipe systems
For installation in cable ducts and on flatbeds

Characteristics:

Easy to use construction
Gel-free cable construction for clean and fast assembly
Small dimensions
High laying stability
Fire behaviour tested and certified according to
Construction Products Regulation (see Euro fire class)

Cable diameter may vary

Technical properties

Application	Inside
Armouring	True
Blow in	False
Cable metal free	True
Cable silicone free	True
Circuit integrity	False
Colour outer sheath	aqua
Crush resistance	1000 N/dm

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.

DATASHEET

INFRALAN® I-B(ZN)BH OM3 24G (2x12) B2ca 3000N LSZH aqua 8.3mm

Fiber Colours	white
Fiber marking	Colour
Fibre category	OM3
Fibre type	Multi mode 50/125
Flame retardant	acc. to EN 60332-3-24
Halogen free	acc. to EN 60754-1/2
Harmonised Standard	EN 50575
IL max. (dB/km) 1300nm	0.8 dB/km
IL max. (dB/km) 850nm	2.7 dB/km
Longitudinal water blocking	False
Low smoke	True
Material outer sheath	LSZH
Oil resistant	no
Radial water blocking	False
Resistant to chemicals	False
Scope of delivery	1x Cable1x Drum
Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Operation)	-10 - 70 °C
Temperature Range (Storage)	-25 - 70 °C
Tube marking	Colour
Tube Ø	1.6 mm
Type of tube	Stranded loose tube
UV resistant	Nein
With rodent protection	True
With strain relief	True

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category of fibres	Number of fibres	Tensile force max.	Number of fibres per tube	Construct	Suitable for underground installation	Outer diameter approx.	Fire load	Minimum bending radius (dynamic)	VDE-Name	Weight	Minimum bending radius (static)
56324.2OM3-CPR	INFRALAN® I-B(ZN)BH OM3 24G (2x12) B2ca 3000N LSZH aqua 8.3mm	B2ca	8.3 mm	OM3	24	3000 N	12	(2x12)	False	8.3 mm	0.78 MJ/m	15xOD mm	I-B(ZN)BH 24G50/125	75 kg/km	10xOD mm

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.



DATASHEET

**INFRALAN® I-B(ZN)BH OM3 24G (2x12) B2ca 3000N LSZH
aqua 8.3mm**

56348.2OM3-CPR	INFRALAN® I-B(ZN)BH OM3 48G (4x12) B2ca 3000N LSZH aqua 8.3mm	B2ca	8.3 mm	OM3	48	3000 N	12	(4x12)	False	8.3 mm	0.78 Mj/m	15xOD mm	I-B(ZN)BH 48G50/125	75 kg/km	10xOD mm
----------------	---	------	--------	-----	----	--------	----	--------	-------	--------	-----------	----------	---------------------	----------	----------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.

