


DATASHEET

INFRALAN® I-B(ZN)BH OM4 48G (4x12) B2ca 3000N LSZH
erica violet 8.3mm

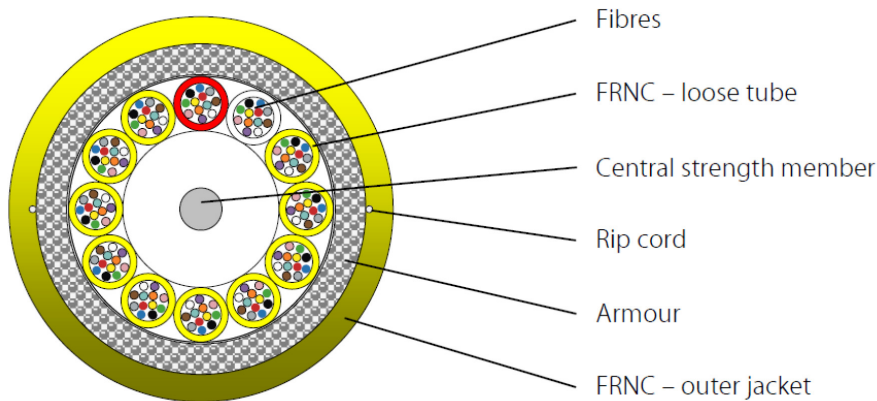

General data

Fields of application:
 For building connections
 For campus cabling
 For use in plastic pipe systems
 For installation in cable ducts and on flatbeds

Characteristics:

Easy to use construction
 Gel-free cable construction for clean and fast assembly
 Small dimensions
 High laying stability
 Fire behaviour tested and certified according to
 Construction Products Regulation (see Euro fire class)

Cable diameter may vary

Technical properties

Application	Inside
Armouring	True
Blow in	False
Cable metal free	True
Cable silicone free	True
Circuit integrity	False
Colour outer sheath	erikaviolett
Crush resistance	1000 N/dm

This datasheet was created automatically on 05-10-2026 . Technical changes reserved.

DATASHEET

INFRALAN® I-B(ZN)BH OM4 48G (4x12) B2ca 3000N LSZH erica violet 8.3mm

Fiber Colours	white
Fiber marking	Colour
Fibre category	OM4
Fibre type	Multi mode 50/125
Flame retardant	acc. to EN 60332-3-24
Halogen free	acc. to EN 60754-1/2
Harmonised Standard	EN 50575
IL max. (dB/km) 1300nm	0.7 dB/km
IL max. (dB/km) 850nm	2.5 dB/km
Longitudinal water blocking	False
Low smoke	True
Material outer sheath	LSZH
Oil resistant	no
Radial water blocking	False
Resistant to chemicals	False
Scope of delivery	1x Cable1x Drum
Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Operation)	-10 - 70 °C
Temperature Range (Storage)	-25 - 70 °C
Tube marking	Colour
Tube Ø	1.6 mm
Type of tube	Stranded loose tube
UV resistant	False
With rodent protection	True
With strain relief	True

Available variants

ArtNr.	Bezeichnung	CPR-Class	Cable Ø	Category of fibres	Number of fibres	Tensile force max.	Number of fibres per tube	Construct	Suitable for underground installation	Outer diameter approx.	Fire load	Minimum bending radius (dynamic)	VDE-Name	Weight	Minimum bending radius (static)
56324.2OM4-CPR	INFRALAN® I-B(ZN)BH OM4 24G (2x12) B2ca 3000N LSZH erica violet 8.3mm	B2ca	8.3 mm	OM4	24	3000 N	12	(2x12)	False	8.3 mm	0.78 MJ/m	15xOD mm	I-B(ZN)BH 24G50/125	75 kg/km	10xOD mm

This datasheet was created automatically on 05-10-2026 . Technical changes reserved.



DATASHEET

INFRALAN® I-B(ZN)BH OM4 48G (4x12) B2ca 3000N LSZH erica violet 8.3mm

56348.2OM4-CPR	INFRALAN® I-B(ZN)BH OM4 48G (4x12) B2ca 3000N LSZH erica violet 8.3mm	B2ca	8.3 mm	OM4	48	3000 N	12	(4x12)	False	8.3 mm	0.78 Mj/m	15xOD mm	I-B(ZN)BH 48G50/125	75 kg/km	10xOD mm
----------------	---	------	--------	-----	----	--------	----	--------	-------	--------	-----------	----------	---------------------	----------	----------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 05-10-2026 . Technical changes reserved.

