


DATASHEET

U-Clamp incl. Bottom Saddle, for Cable Ø 16..22 mm

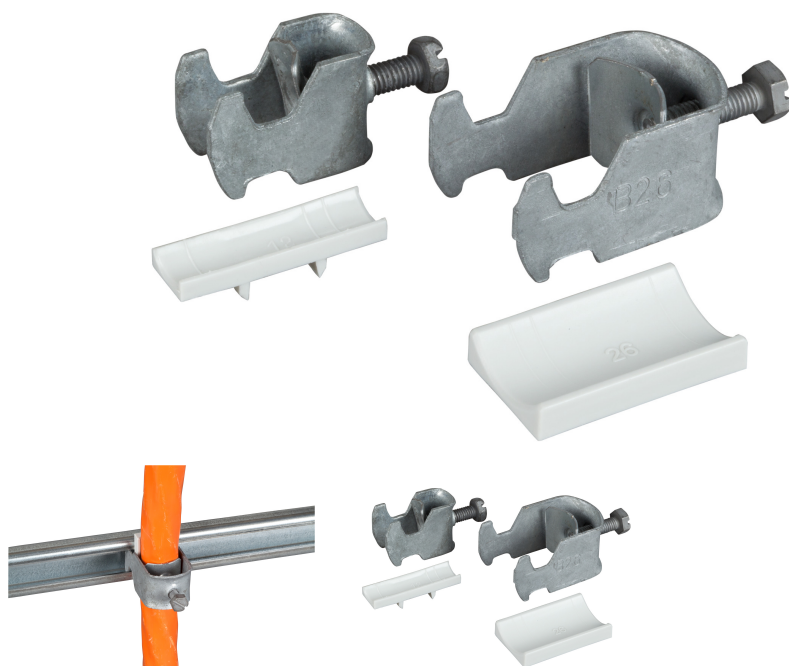

General data

U-clamps for C-profile rails with slot width 16..17 mm

Material steel sheet, galvanised

Delivery incl. bottom saddle

Other dimensions available on request

Technical properties

Material clamp	Steel
Material screw	Steel
Mounting method	C-profile
Surface protection clamp	Hot dip galvanized
With metal tray	False
With plastic tray	True

Available variants

ArtNr.	Bezeichnung	Chuckling range
691275.3	U-Clamp incl. Bottom Saddle, for Cable Ø 16..22 mm	16 - 22 mm
691275.5	U-Clamp incl. Bottom Saddle, for Cable Ø 28..34 mm	28 - 34 mm
691275.7	U-Clamp incl. Bottom Saddle, for Cable Ø 38..42 mm	38 - 42 mm

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.



DATASHEET

U-Clamp incl. Bottom Saddle, for Cable Ø 16..22 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.

