


DATASHEET

19" Rack Frame 24U, Step-Less Adjustable, Max. Load 150 kg

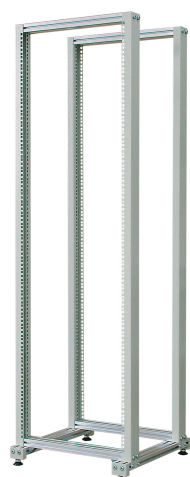

General data

Open rack frame for mounting of 19" components
 Accessibility from all sides for exhibition purposes, laboratory setups and IT installations
 Stable construction, easy assembly
 Mounting depth between 19" levels step-less adjustable from 130 .. 695 mm
 Max. load 150 kg
 Material aluminum profiles (base), steel (19" poles)
 Paint finish steel parts RAL7035, light grey
 Optional castor set PRO-ROL01 please order separately on demand

Variant with max. load 250 kg and mounting depth 711 mm available on request

Technical properties

Material	Steel
Surface finishing	Powder coating

Available variants

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

19" Rack Frame 24U, Step-Less Adjustable, Max. Load 150 kg

ArtNr.	Bezeichnung	Max. load capacity	Number of height units	Colour	Width	Height	Depth	RAL-number
691631GR.24	19" Rack Frame 24U, Step-Less Adjustable, Max. Load 150 kg	150 kg	24 U	grey	544 mm	1177 mm	786 mm	7035
691631GR.42	19" Rack Frame 42U, Step-Less Adjustable, Max. Load 150 kg	150 kg	42 HE	grey	544 mm	1975 mm	786 mm	7035

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

