




DATASHEET

19" Wall Housing 9U, Depth 500 mm, Acoustically Insulated, incl. Silent-Fans

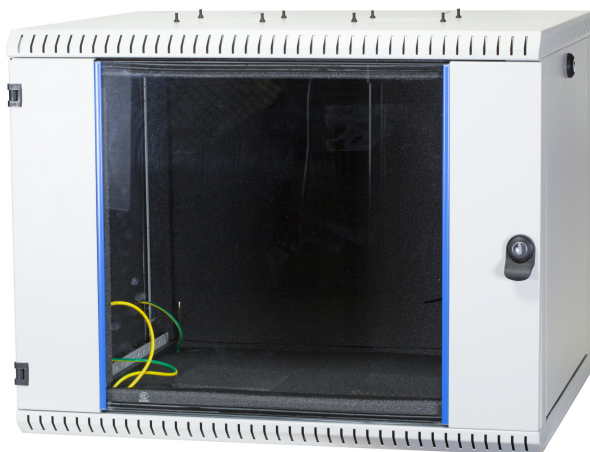

General data

Acoustically high-quality insulated wall housing, basing on EFB standard wall housings
 For realisation of network projects in SoHo environments and acoustical insulation of loud, active devices like e.g. switches, router etc.
 For installation in immediate near of working places, in seminar- or conference rooms without noise pollution
 Complete inner lining with especially noise absorbers
 Attenuation (typ.) 8 .. 25 dB (frequency-dependent)
 Special decoupled Super-Silent fans (evacuating) in roof area
 Converted air volume 196 m³/h
 Closeable fresh air inlets in bottom
 Cable entry in bottom via noise bridge and brush
 Front door with window of certified safety glass (4 mm), lockable
 Side walls detachable, lockable, lock equal to door lock

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.

DATASHEET

19" Wall Housing 9U, Depth 500 mm, Acoustically Insulated, incl. Silent-Fans

Paint finish RAL7035, light grey

Delivery incl. 2 x key, 1 x power supply for the fans

All EFB housings are available as acoustical insulated type - ask your sales contact!

Technical properties	
Cabinet Series	Wall-mounted enclosure, acoustically insulated
Cable entry roof/floor	Base, 250 x 70 mm
Degree of protection	IP20
Demountable	True
Door hinge reversible front door	Yes
Door opening angle front door	120 °
Frame	welded
Installation depth min. - max.	400 mm
Material	Stahl
Max. spacing of the 19" levels	415 mm
Model	With permanent frame
Modular spacing	482,6 mm (19 inch)
Mounting level	Front side
Number of cartons	1
Number of doors	1
PHC replaceable front door	optional (compact swivel lever item no. 699989)
Packaging	Delivered in transport packaging
Scope of delivery	1x Cabinet, 1x Power supply unit for the fans, 2x keys
Structure/Use	Acoustically insulated housing for noise reduction of active devices. Interior lined with special acoustic foam. Attenuation (typ.) 8-25 dB. Two specially decoupled super-silent fans. Air volume 196 m³/h.
Surface finishing	pulverbeschichtet
Type of front door	Glass door with latch lock and viewing window made of certified safety glass (4 mm)
Type of profile rail	L-shape
Type of ventilation	Active
With earthing	True
With front door	True
With roof plate	True
With sidewall	Yes, can be opened and locked

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.

DATASHEET

19" Wall Housing 9U, Depth 500 mm, Acoustically Insulated, incl. Silent-Fans

Available variants

ArtNr.	Bezeichnung	Colour	Depth	Height	Max. Load	Number of height units	Width	RAL-number
691709.1-AK	19" Wall Housing 9U, Depth 500 mm, Acoustically Insulated, incl. Silent-Fans	grey	500 mm	465 mm	50 kg	9 HE	600 mm	7035

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 29-09-2026 . Technical changes reserved.

