


DATASHEET

FO Coupling Splice Closure compact

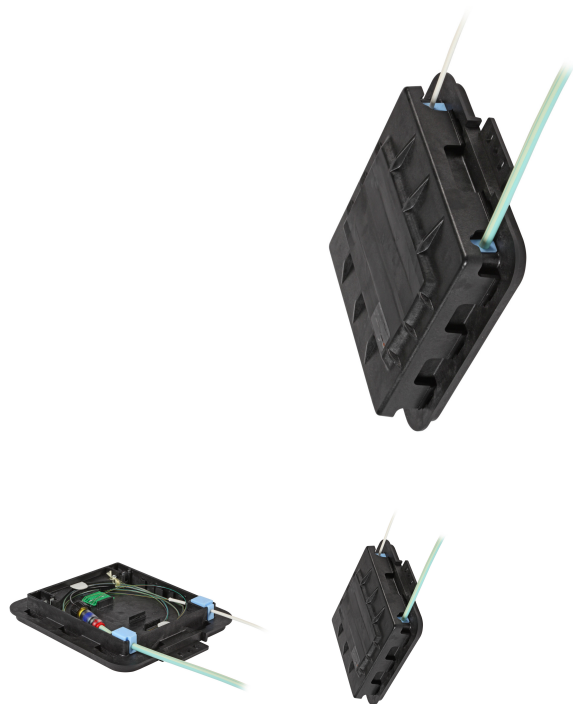

General data

Compact closure, small and flat,
splice holder integrated (delivery unassembled)

Technical properties

Cable Diameter	4.3 – 6.4 mm
Cable glands	4
Colour	Black
Degree of protection	IP68
Design	Inline
Dimension (LxBxH)	232x194x42 mm
Direct Burial	True
In-/Outputs	4
Material	Plastic
Number of splice holders	1
Operating Temperature	-40 – 60 °C
Scope of delivery	1x sleeve incl. splice holder
Sealing Type	Sealing ring

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.



DATASHEET

FO Coupling Splice Closure compact

Splice Cassette	integrated
Splice Holder	crimp
Splice protection	Crimp/ANT
Standards	TR-NWT-000251
Suitable for number of fibres	12
Type of closure	Junction closure
UV resistant	yes

Available variants

ArtNr.	Bezeichnung	Unique
83205.1	FO Coupling Splice Closure compact	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.

