


DATASHEET

Liycy 6x0,14mm² RAL 7001 shielded, grey

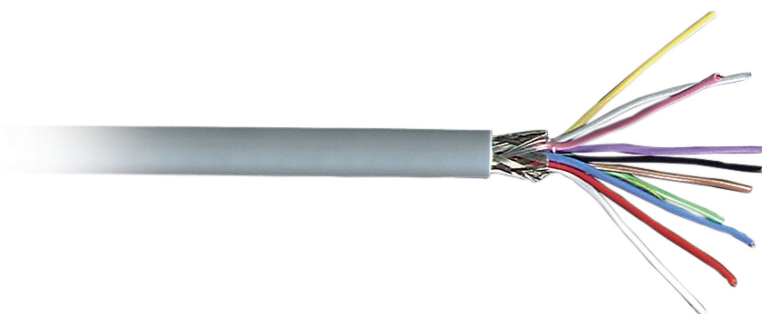

General data

- RAL7001, grey
- Drum size: 1000 metres roll

Technical properties

AWG-size	-
Category	5
Conductor category	Class 2 = stranded
Conductor material	Copper, bare
Core identification	Colour
Core insulation	PVC
Diameter conductor	0.25 mm
Flame retardant	According to IEC/EN 60332-1-2
Material outer sheath	Polyvinylchlorid (PVC)
NVP value	- %
Nominal cross section conductor	0.14 mm ²
Operating temperature, fix	80 - °C
Operating temperature, flexible	70 - °C
Screen over stranding	braiding
Screen over stranding element	None
Stranding element	No

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Number of cores	Outer diameter approx.
--------	-------------	---------------------	-----------------	------------------------

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.



DATASHEET

Liycy 6x0,14mm² RAL 7001 shielded, grey

90006.1	Liycy 6x0,14mm ² RAL 7001 shielded, grey	grey	6	4.9 mm
---------	---	------	---	--------

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.

