
DATASHEET

INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25G-bit/s ready yellow RAL1021

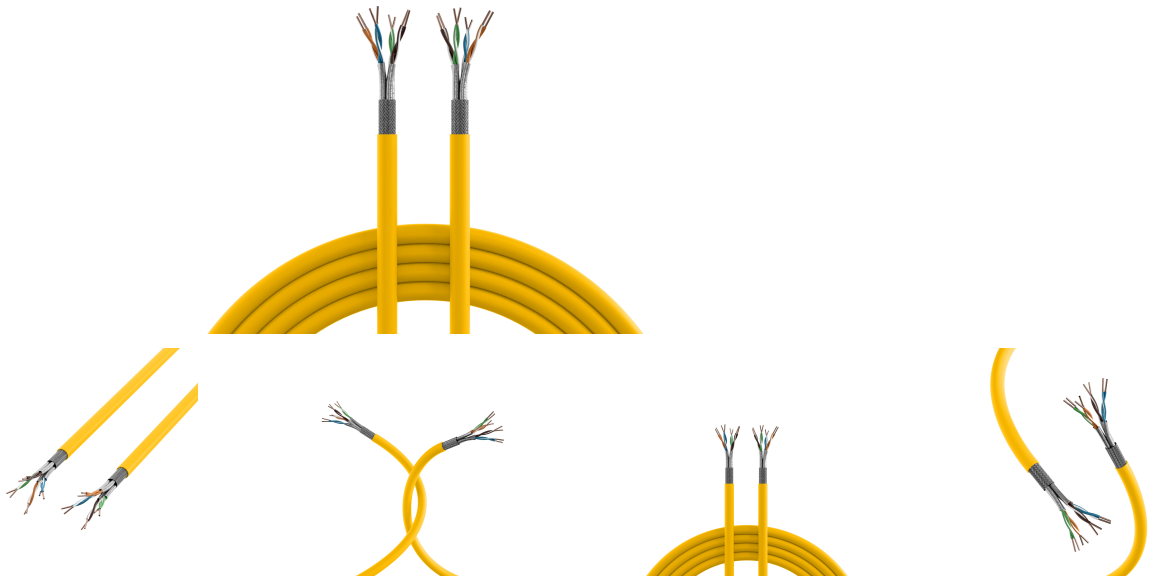

General data

The variation group INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P describes a halogen-free data cable Cat.7A S/FTP in yellow for high-performance network cabling. The LSZH sheathed design supports stable data connections up to 1250 MHz and is therefore designed for modern installations with high bandwidth.

• 1250 MHz Cat.7A bandwidth – Supports transmission standards from IEEE 802.3 10Mbit to 25Gbit and creates reserves for high-performance networks.
• S/FTP construction with foil + braid – Reduces interference and supports stable signal quality in demanding cabling.
• LSZH jacket in yellow according to RAL 1021 with Euroclass Dca – Is halogen-free according to EN 60754-1/2 and complements the installation with a contemporary choice of materials.

The cable is designed as a simplex and uses 22/1 conductors with 8 wires. The dynamic bending radius of 40 mm facilitates installation. The shielding made of foil + braid supports decoupling from external influences and the structure is intended for PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt. The version without reinforcement is aimed at installation in structured network environments.

Technical details
• Brand: INFRALAN
• Category: Cat.7A

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25G-bit/s ready yellow RAL1021

- Transmission standards: IEEE 802.3 10Mbit to 25Gbit
- Max. frequency: 1250 MHz
- Cable construction: S/FTP
- PoE: after IEEE802.3af PoE, after IEEE802.3at PoE+, after IEEE802.3bt 4PPoE
- AWG cross-section/number of wires: 22/1
- Number of cores: 8
- Type: simplex
- Sheath material: LSZH
- Sheath colour: Yellow
- RAL colour: RAL 1021
- Armour: without
- Bend radius (dynamic): 40 mm
- Directive/Regulation: RoHS 2011/65/UE
- Euroclass: Dca
- Halogen-free: according to EN 60754-1/2
- Shield over stranding: foil + braid

Technical properties	
AWG-size	22/1
Armour	none
Bending radius (dynamic)	40 mm
Cable	IEC 61156-6
Cable silicone free	True
Cable structure	S/FTP
Cable type	EFB Cat.7A S/FTP 1250 AWG22 Dca
Cabling standards	ISO/IEC 11801
Category	7A
Characteristic impedance	100 ± 5 Ohm
Conductor category	Class 1 = solid
Conductor material	Copper, bare
Core identification	Colour
Core insulation	Foam-Skin-PE
Coupling attenuation	≥ 80 dB
Diameter conductor	0.62 mm
Directive/Regulation	RoHS 2011/65/UE
Euro class	Dca
Flame retardant	acc. to EN 60332-1
Halogen free	acc. to EN 60754-1/2
Harmonised Standard	EN 50575

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25G-bit/s ready yellow RAL1021

Installation standard	EN 50174
Insulation resistance (500V)	≥ 5000 MOhm/km
Loop resistance	140 Ohm/km
Low smoke	acc. to EN 61034
Material outer sheath	LSZH
Max. Freuqency	MHz MHz
NVP value	74 %
Operating capacity	43 pF/km
Operating temperature, fix	-15 – 75 °C
Operating temperature, flexible	0 – 50 °C
Operating temperature, storage	-20 – 60 °C
PoE	acc. to IEEE802.3af PoE
Resistance unbalance	2 %
Screen over stranding	foil + braid
Screen over stranding element	Braiding
Separation class acc. EN50174-2	D
Stranding element	Pairs
Test voltage DC, 1 min	1000 V
Transmission standards	IEEE 802.3 10Mbit bis 25Gbit
UV resistant	Nein

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Number of cores	RAL colour	Type	Copper weight	Weight	Max. tractive force	Outer diameter approx.	Fire load
999833.1-CPR	INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25Gbit/s ready yellow RAL1021	yellow	1.00 m	8	RAL 1021	simplex	27.4 kg/km	64 kg/km	110 N	8 mm	640 MJ/km
999833.100-CPR	INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25Gbit/s ready yellow RAL1021	yellow	100.0 m	8	RAL 1021	simplex	27.4 kg/km	64 kg/km	110 N	8 mm	640 MJ/km

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25G-bit/s ready yellow RAL1021

999833.500-CPR	INFRALAN® Cat.7A 1250 AWG22 S/FTP 4P, CPR Dca 25Gbit/s ready yellow RAL1021	yellow	500.0 m	8	RAL 1021	simplex	27.4 kg/km	64 kg/km	110 N	8 mm	640 MJ/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION