


DATASHEET

INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 500m

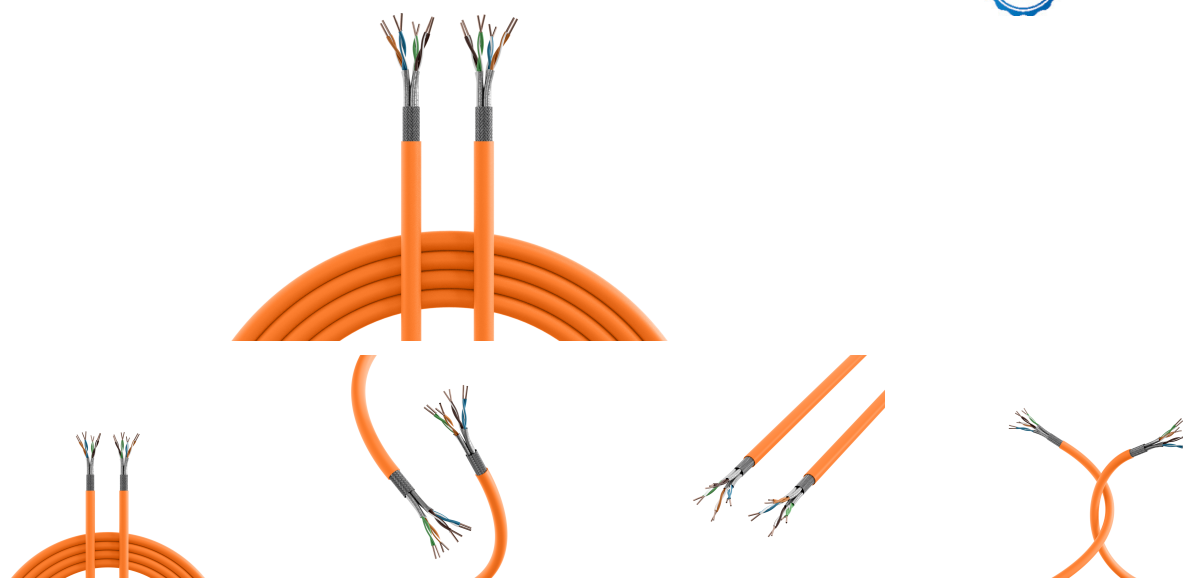

General data

The INFRALAN® installation cable is constructed for transmissions up to **1000 MHz** and exceeds the requirements of the category 7 with the electrical transmission properties. With this cable transmission rates up to 10 GBit according to IEEE 802.3 are possible.

Technical properties

AWG-size	23/1
Armour	none
Bending radius (dynamic)	60 mm
Cable	IEC 61156-6
Cable silicone free	True
Cable structure	S/FTP
Cable type	EFB Cat. 7A S/FTP 1000 AWG23 Cca
Cabling standards	ISO/IEC 11801
Category	7
Characteristic impedance	100 ± 5 Ohm
Conductor category	Class 1 = solid

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.



DATASHEET

INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 500m

Conductor material	Copper, bare
Core identification	Colour
Core insulation	Foam-Skin-PE
Coupling attenuation	≥ 80 dB
Diameter conductor	0.56 mm
Directive/Regulation	RoHS 2011/65/UE
Euro class	Cca
Flame retardant	acc. to EN 60332-1
Halogen free	acc. to EN 60754-1/2
Harmonised Standard	EN 50575
Installation standard	EN 50174
Insulation resistance (500V)	≥ 2000 MOhm/km
Loop resistance	154 Ohm/km
Low smoke	acc. to EN 61034
Material outer sheath	LSZH
Max. Frequency	MHz MHz
NVP value	79 %
Operating capacity	43 pF/km
Operating temperature, fix	-20 - 60 °C
Operating temperature, flexible	0 - 50 °C
Operating temperature, storage	-20 - 60 °C
PoE	acc. to IEEE802.3af PoE
Resistance unbalance	2 %
Screen over stranding	braiding
Screen over stranding element	Foil
Separation class acc. EN50174-2	D
Stranding element	Pairs
Test voltage DC, 1 min	1000 V
Transmission standards	IEEE 802.3 10Mbit bis 10Gbit
UV resistant	no

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Number of cores	Type	Copper weight	Weight	Max. tractive force	Outer diameter approx.	Fire load
--------	-------------	---------------------------	--------	--------------------	------	------------------	--------	---------------------------	------------------------------	--------------

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.



DATASHEET

INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 500m

99988.1-CPR	INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 1000m	orange	1000 m	8	simplex	26 kg/km	54.5 kg/km	110 N	7.3 mm	640 MJ/km
99988.100-CPR	INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 100m	orange	100 m	8	simplex	26 kg/km	54.5 kg/km	110 N	7.3 mm	640 MJ/km
99988.500-CPR	INFRALAN Cat.7 1000 AWG23 S/FTP 4P CPR Cca orange 500m	orange	500 m	8	simplex	26 kg/km	54.5 kg/km	110 N	7.3 mm	640 MJ/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

