DATASHEET

A-DQ(ZN)B2Y OM5 4G (1x4), 3000N black 7mm

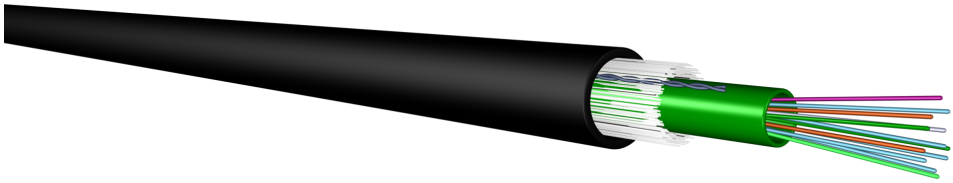

General data

Fiber optic cable with a central, gel-filled loose tube and up to 24 fibers for outdoor applications and direct burial with a tensile strength of 3.000 N. Dielectrically armored construction with fibers, longitudinally watertight, rodent-proof, and LDPE jacket. Used for LAN and WAN backbones, telecom access lines, fiber-to-business and fiber-to-the-building drop connections, as well as fiber-to-the-home drop and access connections.

Technical properties	
Application	Outside
Armouring	True
Blow in	False
Cable metal free	True
Cable silicone free	True
Circuit integrity	No
Colour outer sheath	black
Crush resistance	3000 N/dm
Fiber Colours	white
Fiber marking	Colour
Fibre category	OM5
Fibre type	Multi mode 50/125
Flame retardant	No
Halogen free	acc. to EN 60754-1/2
IL max. (dB/km) 1300nm	1.0 dB/km
IL max. (dB/km) 850nm	3.0 dB/km
Longitudinal water blocking	True
Low smoke	nein
Material outer sheath	Polyethylene (PE)
Oil resistant	no
Radial water blocking	True
Resistant to chemicals	False
Scope of delivery	1x Cable, 1x Drum

This datasheet was created automatically on 24-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

A-DQ(ZN)B2Y OM5 4G (1x4), 3000N black 7mm

Temperature Range (Installation)	-15 – 60 °C
Temperature Range (Operation)	-30 – 70 °C
Temperature Range (Storage)	-30 – 60 °C
Tube marking	Colour
Tube Ø	2.8 mm
Type of tube	Central tube
UV resistant	True
With rodent protection	True
With strain relief	True

Available variants

ArtNr.	Bezeichnung	Cable Ø	Category	Number of fibres	Tensile force max.	Number of fibres per tube	Construct	Suitable for underground installation	Outer diameter approx.	Minimum bending radius (dynamic)	VDE-Name	Weight	Minimum bending radius (static)
A24M5F2	A-DQ(ZN)B2Y OM5 24G (1x24), 3000N black 7mm	7.0 mm	OM5	24	3000 N	24	(1x24)	True	7.0 mm	20xOD mm	A-DQ(ZN)B2Y	48.9 kg/km	10xOD mm
A4M5F2	A-DQ(ZN)B2Y OM5 4G (1x4), 3000N black 7mm	7.0 mm	OM5	4	3000 N	4	(1x4)	True	7.0 mm	20xOD mm	A-DQ(ZN)B2Y	48.3 kg/km	10xOD mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION